


AMP "HEAVY DUTY VENTILATED" K.D. ATHLETIC TRIPLE TIER LOCKER (18' OR 24' WIDE) (PRODUCT No. HDV _____ -3_)

ELEVATION ' / '

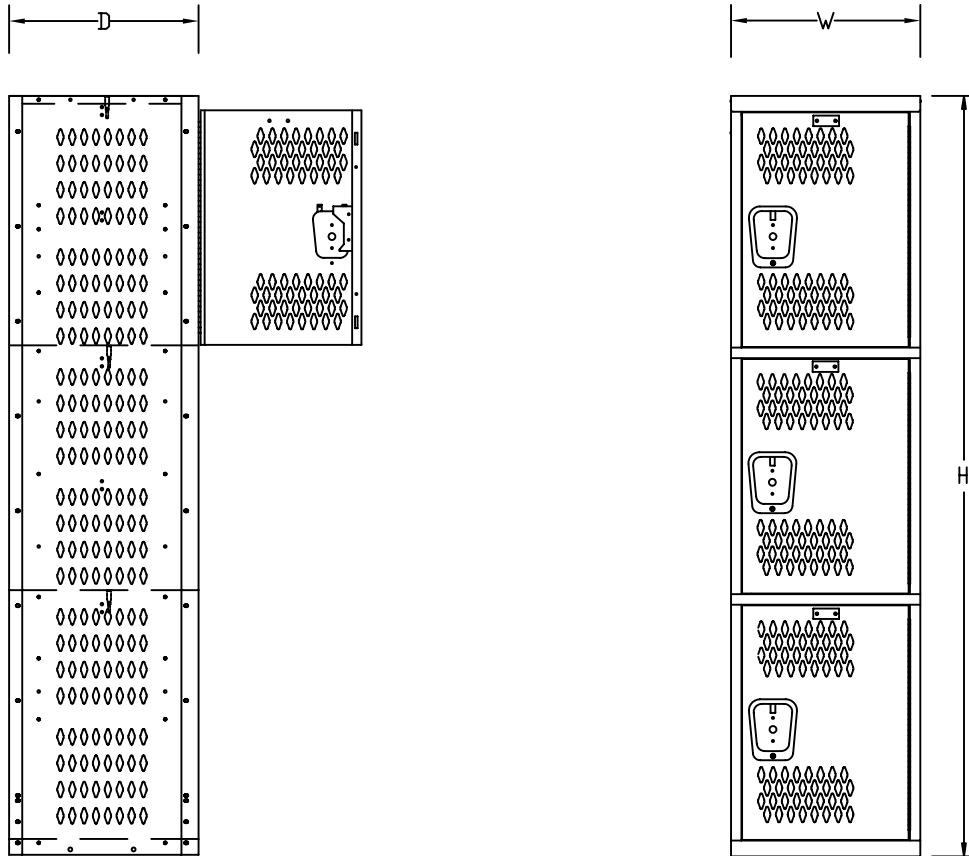

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
 BODY COMPONENT COLOR = 729 PARCHMENT OR
 725 HALLOWELL GRAY

TOP =
 HANDLE = LIFT (S.S. RECESSED DRAWN)
 DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND
 BASE =
 LOCKS =
 HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.
 FRAME = 16 GA., C.R.S.
 TOP = 16 GA., C.R.S.
 BOTTOM = 16GA., C.R.S.
 SHELVES = 16 GA., C.R.S.
 SIDES = 16 GA., C.R.S.
 BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTO-
 MATIC LOCKING DEVICE WITH LIFT-TYPE
 PADLOCK HASP. 36" TO 20" TALL DOORS.

ART METAL PRODUCTS

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL
 PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED
 MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME
 JOB LOCATION

Drawn By:
 DRAFTER

Checked By:

Date:
 DATE

Scale:
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER