Worldwide Storage Solutions



2022 Online Revision

FULL LINE GATALOG



- WELDED & KD LOCKERS
- CUSTOM WOOD LOCKERS
- PHENOLIC LOCKERS
- PLASTIC LOCKERS
- ALL-WELDED CUBBIES
- LOCKER LOCKS

- BENCHES & PEDESTALS
- BULK STORAGE LOCKERS
- STORAGE CABINETS
- STEEL SHELVING
- BOLTLESS SHELVING
- PORTABLE GATES

www.ArtMetalProducts.com



FROM OUR FAMILY TO YOURS



JR LIST PRESIDENT

JR Lit

We have earned the respect of our customers and competitors because of our dedication to quality. Customer feedback has paved the way for the inclusion of knock-down lockers, steel shelving, rivet-type shelving, bulk storage lockers, portable gates, all-welded cubbies and storage cabinets into our product line offerings.

With the addition of our new state-of-the-art powder coat finishing system, we are prepared to meet the demands of today's market while doing our share to help improve our environment. We have also added many new products such as plastic lockers, specialty lockers, industry specific lockers, extreme performance lockers, an expanded line of wood & phenolic lockers and our national distribution system, with six national distribution centers to greatly speed up delivery in all 50 states.



Our diverse product line and custom manufacturing process allows us the flexibility to create lockers, cabinets and shelving to meet and exceed all of your requirements. Our wide variety of colors also allows you to easily incorporate our products into your designs.

I am proud to be at the helm of Art Metal Products, along with a team of dedicated professionals that are driven to meet client needs on a consistent basis, delivering quality and innovative products. We have also elevated the concept of "service" to an art form.

We have strived, since acquiring Art Metal Products, to continue a tradition of high quality products and timely deliveries, second to none. This we have done!

SETTING THE STANDARD FOR QUALITY SINCE 1914.

Art Metal Products, are manufactured in our two modern, highly efficient, state-of-theart facilities in Deerfield Beach and Apopka, Florida. We recently expanded capacity, making room for the installation of five million dollars' worth of computer-controlled fabricating, roll-forming and powder coat finishing systems to ensure consistent, quality workmanship.

Our top-of-the-line, automatic, numerically controlled, quick color change finishing system allows us to offer 24 standard designer powder coat applied colors with the highest quality and most durable paint finish in the industry.

From initial design to manufacture and finish, Art Metal Products lockers are engineered using the most advanced computer technology to give you quality you can rely on.

Our complete line of ProSport Lockers offers you twelve standard configurations per size, before adding options to further meet your needs. The expansion of our Recruiter™ wood and Phenolic Lockers lines insures a locker to meet your specific facility needs



Turret Press

This catalog depicts just a few of the endless design possibilities when choosing Art metal Product lockers; it also includes other product lines, all manufactured to the same high standards you have come to expect. We welcome the opportunity to work directly with you to custom design a locker room environment that is productive and attractive while remaining time and cost efficient.

Our team of designers, engineers and sales professionals is available to assist you every step of the way, from initial budget planning to final project closeout.

Art Metal Products leads the way in quality and customer service. From our corporate headquarters in Deerfield Beach, our three manufacturing plants in Florida, six strategically located regional distribution centers, seven regional sales offices located throughout the United States and our network of more than 100 authorized distributors nationwide, we provide the quality you demand, the timeliness you require and the service you deserve.





All AMP metal and plastic lockers are Greenguard Gold Certified.

Greenguard is an indoor air quality certification program for low emitting products and materials that evaluates over 75,000 chemicals, including volatile organic compounds, carcinogens, and reproductive toxins. Referenced in both the Collaborative for High Performance Schools (CHPS) and the Leadership for



Energy and Environment Design (LEED) Building Rating System, Greenguard Gold Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.



GALVANITETM CORROSION RESISTANT SHEET STEEL

Ideal for use in high humidity areas, outdoor locations, near shower, pool areas and food industry facilities

GALVANITE™, is Art Metal Products trade marked name for lockers and cabinets manufactured with galvanneal sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanite and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated life cycle threefold.

GALVANNEAL SHEET STEEL

with our powder coat finish after a 336 hour salt spray test.



What Is Galvanneal?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake off its galvanized coating when formed, stamped, and bent. The very fine matte finish acts like a primer that easily adheres to paint. These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.

COMMON COLD ROLLED SHEET STEEL

with a 1 mil dry film build paint thickness after a 336 hour salt spray test.



TABLE OF CONTENTS

DDODLICTS

LUDOCIO	FAGL
Twin-Framed All-Welded Production Lockers Task ForceXP All-Welded Lockers	
Turnout Gear Fully Framed Lockers	
TA-50 Fully Framed Military Gear Lockers	
Welded Cubbies	26
Knock-Down (KD) Production Lockers	28
Benches & Pedestals	40
Locks	41
Cubix Lockers	43
Backpack/Laptop lockers	44
Cell Phone lockers	45
Bulk Storage Lockers (BSL)	46
Parcel Lockers	48
Portable Gates	49
Wood Lockers	50
AquaMax™ HDPE Solid Plastic Lockers	56
VersaMax™ Phenolic Lockers	58
HiTech [®] Clip Shelving	60
DuraTech™ PassThru Shelving	66
Rivetwell™ Boltless Shelving	68
400-800 Series KD Cabinets	76
DuraTough™ All Welded Cabinets	
Color Options	84-85
Quick-Ship Program	86



Manufacturing facilities where Art Metal Products are made in Deerfield Beach, Florida.



INNOVATIONS THAT MAKE US THE INDUSTRY LEADER...

OUR STEEL

Most of our steel is purchased directly from US mills and is made of 30% post consumer recycled content and 11.3% post industrial/pre-consumer content.

OUR PAINT

Sherwin Williams powders are made in the USA insuring no harmful materials. Hammertone textured finishes are available for all 24 standard colors. **Medsafe**[®] antimicrobial finishes with Microban[®] are available for all 24 colors





WE ARE GREENGUARD GOLD CERTIFIED

GREENGUARD Gold Certification establishes strict chemical emmission standards for products intended for use in environments where children and others work, play or reside.

AMP LOCKERS LOCK BARS ARE INSTALLED AFTER THE **DOORS ARE PAINTED**



LOCK CHANNEL

Roll formed G90 Hot dipped galvanized lock bars

are installed after the doors are painted to ensure complete paint coverage, corrosion resistance and smoother lock bar operation. Others use standard steel and/or install the paint coverage leading to corrosion

lock channel before paint trapping moisture in, preventing proper problems.



Available for all standard 24 colors

Our MedSafe™ antimicrobial finishes with Microban[®] are specially formulated to protect against bacteria, mold, yeast & mildew for up to 20 years! Very beneficial for educational, healthcare, food processing and other hygiene conscious environments.



Dupont® Supertough® nylon latches are made in the USA and are installed after paint to insure a lifetime of performance. Use of lower quality plastics and/or installing before paint can cause brittlness and poor performance.

TWIN-FRAME ALL-WELDED LOCKERS




What Are Twin-Frame™ All-Welded Lockers?

Art Metal Products Twin-Frame all-welded lockers include our twin vertical frame design adding strength, integrity, durability and added visual appeal.

- First we start with prime grade cold rolled sheet steel, 16 gauge for all components except backs which are 18 gauge and doors which are 14 gauge.
- Sides are formed to be an integral part of the front vertical locker frame which locks into the bottom for accurate alignment and added strength
- We MIG weld an additional channel shaped vertical frame member at intermediate dividers providing a continuous door strike at both the hinge and latch side of the door
- The top and bottom are flanged downward at the front to form a 1-1/2" high channel shaped top and bottom horizontal frame member continuous across the multiple column unit up to 60" wide
- The base is a full 1-1/2" high keeping locker contents away from moisture on the floor and/or wood/concrete base.
- Front-to-back channel stiffeners are welded into the base under each side panel providing a strong anchor bearing surface for installation and increasing overall unit strength.

- Horizontal tier dividers for double and triple tier models project through to the face of the locker forming a horizontal cross member between doors for maximum strength
- All doors are heavy 14 gauge. A full-height vertical door stiffener welded to the hinge side of the door is available in our Elite series and standard in our Bulldog models when maximum door strength is desired
- Recessed handle wardrobe models AMP-1002, AMP-1003, AMP-1004 and AMP-1005 include our deep-drawn seamless 304 stainless steel recessed handle. AMP-1006 box lockers are also available with optional recessed handle (see page 24 for details)
- All doors are right hand hinged using our 16 gauge continuous piano hinge
- Engineered to last the lifetime of your facility. We guarantee it with our lifetime warranty on all Twin-Frame all-welded lockers.

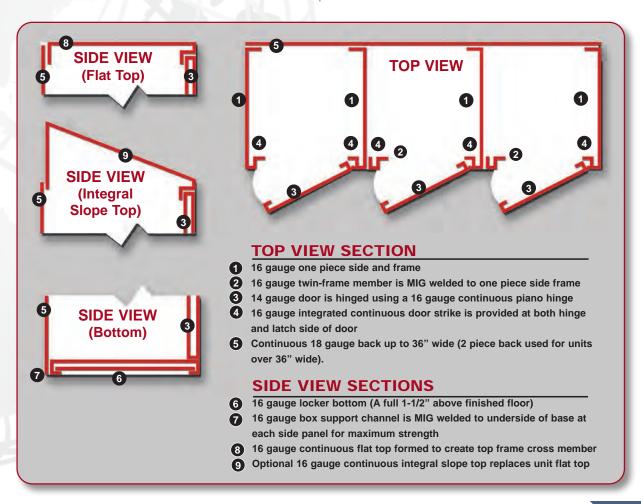



TWIN-FRAME ALL-WELDED SPORT LOCKERS









Our complete line-up of open-front sport lockers is a collection of specialty lockers engineered for high school, collegiate and professional team organizations who demand high performance equipment storage solutions.

Our Pro-Sport Twin-Frame all-welded open-front athletic lockers are designed to accommodate the storage of a wide variety of athletic gear and apparel while allowing maximum ventilation.

Base model Pro-Sport locker includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can complete your Pro-Sport locker with our optional stainless steel coat rod.

Our Twin-Frame design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation. Pro-Sport lockers are engineered to last the lifetime of your facility. We guarantee it!

Shown with optional 12" wide security box, stainless steel coat rod and foot locker/seat

PRO-SPORT LOCKER SIZES:

Widths 18", 24", 30", 33" & 36" Depths 16", 18", 22" Column Heights 60", 72", 84"

Note: Pro-Sport lockers will ship in multiple column units up to 60" wide to meet individual jobsite conditions.




Optional integral slope top 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.

FEATURES & OPTIONS

CONFIGURATIONS DESIGNED TO MEET YOUR LOCKER NEEDS

UPPER OPTIONS



Open top shelf with under hang hooks



Upper wallet security box with stainless steel coat rod



12" wide security box with stainless steel coat rod



Art Metal Product

Full width security box with stainless steel coat rod



ANTIMICROBIAL Wallet and 12" wide Security boxes have single-point thru-the-door **PROTECTION** projecting Antimicrobial finger pulls for protection against bacteria.

LOWER OPTIONS



Open lower



Reinforced seat



Foot locker with reinforced seat



Underside of foot locker seat is reinforced to support today's athlete

ADDITIONAL OPTIONS



Shoulder pad rack



Shoulder pad rack with helmet support



2" or 3" Padded seat cushion

A POPULAR CONFIGURATION

Shown here with full width security compartment, stainless steel coat rod and lower shelf/seat. Both security compartment sides are ventilated. See page 88 for color selections.

LOCKER SIZES

Widths 18", 24", 30", 33", 36" Depths 12", 16", 18", 22" Nominal Heights 60", 72", 84"

FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

SECURITY BOX DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available.

HINGES: 16 gauge continuous piano type

OPTIONAL LOWER SEAT/SHELF: Shall be 16 gauge 1" with a reinforcing bar welded to lower front for rigidity.

OPTIONAL FOOT LOCKER: 14 gauge cold rolled steel with Secure-Air-Flow mini louvers ventilation, seat opens for storage.

STANDARD: hat shelf and two single prong wall hooks, one double prong ceiling hook.



AMP-1001 3 POINT TURN-HANDLE ATHLETIC LOCKERS







Guaranteed for the life of your facility!

This 3-point positive latching system all-welded locker is one of the most rugged and durable lockers currently available.

Engineered to utilize our new Twin-Frame all-welded construction, AMP-1001 lockers are manufactured to be both secure and durable to hold up to the abuse of today's athletes. Positive latching is achieved using a 3-point turn-handle locking mechanism which when locked, provides maximum security. With the simple action of turning the handle, 3/8" diameter lock rods engage the frame through guide holes in the return flanges of the locker top and bottom while simultaneously, a heavy-gauge latch rotates behind the continuous door strike which is an integral part of the vertical frame.





STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22"

DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 36", 48", 60", 72" Opening Heights 24", 30", 36" Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES & OPTIONS



AMP-1001 Turn-Handle Athletic Twin-Frame All-Welded Lockers





AMP-1001 ELITE SERIES LOCKERS which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 12" wide AMP-1001E Elite Series lockers.

Not available in 9" wide lockers



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



3-POINT HIGH SECURITY TURN HANDLE

3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam,11 gauge lock plate keeper is welded to center side of frame

Not available in 9" wide lockers.



DOOR HINGES: Hinges for wardrobe doors shall not be less than 16 gauge continuous piano type, securely riveted to frame and welded to the door. All doors shall be right hand side hinged.

AMP-1001 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

HANDLE: 3-point turn-handle latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch

side

LATCHING: 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam,11 gauge lock plate keeper is welded to center side of frame

HINGES: 16 gauge continuous piano type

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SIZES: See chart on pg 8 for standard wardrobe locker sizes




AMP-1002 CHAMP ATHLETIC LOCKERS





Our stylish Twin-Frame all-welded locker with the deep-drawn seamless stainless steel recessed handle is the perfect choice for the demanding designer.

These are our most popular athletic lockers and for good reason. AMP-1002 lockers incorporate our proven gravity lifttype latching mechanism for a smooth, quiet and dependable operation. Champ Athletic lockers are perfect for use in combination with welded box lockers in P.E. locker rooms.

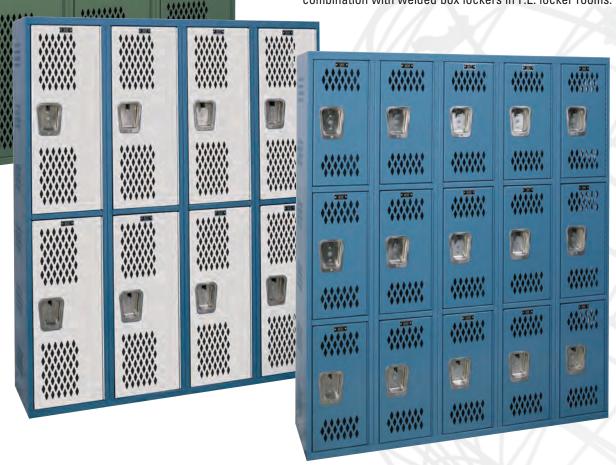

STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22"

DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 36", 48", 60", 72" Opening Heights 24", 30", 36" Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES & OPTIONS



AMP-1002 champ athletic Twin-Frame All-Welded Lockers



AMP-1002E ELITE SERIES LOCKERS which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1002E Elite Series lockers.



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



DEEP-DRAWN 304 STAINLESS STEEL RECESSED HANDLE with multi-point gravity lift-type latching includes our Antimicrobial Recessed Handle Finger Lift Cover for protection against bacteria.





DOOR HINGES: Hinges for wardrobe doors shall not be less than 16 gauge continuous piano type, securely riveted to frame and welded to the door. All doors shall be right hand side hinged.

AMP-1002 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and louvered door styles are available handle: Deep-drawn seamless stainless steel recessed handle door strike: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano type

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher



AMP-1003 CHAMP CORRIDOR LOCKERS





With louvered doors, solid sides and our deep-drawn seamless stainless steel recessed handle with gravity lift-type latching mechanism, our AMP-1003 lockers are the top choice for corridor and staff lockers.





THE NEW Z-TIER UNIBODY LOCKERS creates a unique multi-height storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.

STANDARD SIZES FOR ALL TWIN-FRAME **ALL-WELDED WARDROBE LOCKERS**

SINGLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 36", 48", 60", 72" Opening Heights 24", 30", 36"

DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Column Heights 60", 72"

Z-STYLE

Widths 12", 15", 18" Depths 12", 16", 18", 22" Opening Heights 24/36", 30/42" Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES & OPTIONS



AMP-1003 Champ Corridor Twin-Frame All-Welded Lockers





AMP-1003E ELITE SERIES LOCKERS which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1003E Elite Series lockers.



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



DEEP-DRAWN 304 STAINLESS STEEL RECESSED HANDLE with multi-point gravity lift-type latching includes our Antimicrobial Recessed Handle Finger Lift Cover for protection against bacteria.





DOOR HINGES: Hinges for wardrobe doors shall not be less than 16 gauge continuous piano type, securely riveted to frame and welded to the door. All doors shall be right hand side hinged.

AMP-1003 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- · 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano type

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SIZES: See page 14 for standard wardrobe locker sizes



AMP-1004 BULLDOG ATHLETIC LOCKERS







Our Twin-Frame design, deep-drawn seamless stainless steel recessed handle, continuous piano hinge and torque-free reinforced heavy-gauge door are standard for AMP-1004 Bulldog athletic lockers making them the perfect choice for your athletic locker areas.





STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 36", 48", 60", 72" Opening Heights 24", 30", 36"

DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES & OPTIONS



AMP-1004 Bulldog Athletic Twin-Frame All-Welded Lockers





BULLDOG LOCKERS include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1004 Bulldog lockers.



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



BULLDOG DEEP-DRAWN
SEAMLESS STAINLESS STEEL
RECESSED HANDLE: All locker doors
shall have a deep-drawn seamless not
less than 304 stainless steel recessed
handle shaped to receive a padlock or
built-in combination lock. The recess pan
shall be deep enough to have the lock be
completely flush with the outer door face.
The pull handle shall be drawn into the
left side of the handle for easy opening of
the locker door.



DOOR HINGES: Hinges for wardrobe doors shall not be less than 16 gauge continuous piano type, securely riveted to frame and welded to the door. All doors shall be right hand side hinged.

AMP-1004 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors and 18 gauge full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle is standard.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching

System with 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano type

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SIZES: See page 14 for standard wardrobe locker sizes



AMP-1005 BULLDOG CORRIDOR LOCKERS





Our single-point all-welded corridor lockers have achieved a standard of excellence that only Art Metal Products can provide.

With the elegance of our Twin-Frame design, smooth deep drawn seamless stainless steel recessed handle, continuous piano hinge and torque-free reinforced heavy-gauge door, you can rest assured that you have chosen a locker which will enhance the architectural design of your facility while providing a lifetime of maintenance-free use.



NEW Z-TIER UNIBODY lockers creates a unique multiheight storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.

STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 36", 48", 60", 72" Opening Heights 24", 30", 36"

DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Column Heights 60", 72"

Z-STYLE

Widths 12", 15", 18" Depths 12", 16", 18", 22" Opening Heights 24/36", 30/42" Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES & OPTIONS



AMP-1005 Bulldog Corridor Twin-Frame All-Welded Lockers



BULLDOG LOCKERS include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1005 Bulldog lockers.



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



BULLDOG DEEP-DRAWN SEAMLESS STAINLESS STEEL RECESSED HANDLE: All locker

doors shall have a deep-drawn seamless not less than 304 stainless steel recessed handle shaped to receive a padlock or built-in combination lock. The recess pan shall be deep enough to have the lock be completely flush with the outer door face. The pull handle shall be drawn into the left side of the handle for easy opening of the locker door.



DOOR HINGES: Hinges for wardrobe doors shall not be less than 16 gauge continuous piano type, securely riveted to frame and welded to the door. All doors shall be right hand side hinged.

AMP-1005 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

D00RS: 14 gauge plain doors and a full-height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle door strike: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano type

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier 1-double and 1-single hook for 9" wide openings 30" and higher

SIZES: See page 16 for standard wardrobe locker sizes



AMP-1006 ATHLETIC BOX LOCKERS





Art Metal Products all-welded box lockers are the perfect storage solution when space is at a premium.

Incorporating our new Twin-Frame design with easy to open single-point thruthe-door friction catch/door pull padlock hasps and diamond perforated doors and sides, our welded box lockers will stand the test of time. Our all-welded box lockers are excellent in combination with any of our AMP-1002, AMP-1003, AMP-1004 and AMP-1005 wardrobe lockers providing box door to wardrobe ratios to meet all of your P.E. locker requirements.





CHOOSE FROM UNLIMITED COMBINATIONS TO MEET YOUR SPECIFIC LOCKER NEEDS

Widths for all gym locker openings 12", 15", 18" Depths for all gym locker openings 12", 16", 18", 22"

Padlock Strike

Plates

	TIER	OPENING HEIGHTS	NOMINAL COLUMN HEIGHTS
4 TIER TO 9 TIER	Four Tier Five Tier Six Tier Seven Tier Eight Tier Nine Tier	8", 9", 12", 15", 18" 12", (4) 15" & (1) 12" 8", 10", 12" (6) 10" & (1) 12" 8", 9"	32", 36", 48", 60", 72" 60", 72" 48", 60", 72" 72" 64", 72" 72"

FEATURES & OPTIONS



AMP-1006 Athletic Box Twin-Frame All-Welded Lockers





UPGRADE TO AMP-1006E

Elite Series lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 12" wide AMP-1006E Elite Series all-welded box lockers.



OPTIONAL deep-drawn 304 stainless steel recessed handle with single-point latching



OPTIONAL INTEGRAL SLOPE TOP 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.

STANDARD SINGLE-POINT

thru-the-door projecting Antimicrobial finger pull for protection against bacteria.





OPTIONAL Padlock Strike Plates for box doors protect finish from being marred by padlock



AMP-1006 FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

HANDLE/LATCHING: Single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available

HINGES: 16 gauge continuous piano type

HOOKS: None

SHELVES: 16 gauge intermediate shelves

SIZES: See chart page 21 for standard box locker sizes

NOTE: 8" and 9" high box doors will be top hinged with a concealed 3/8"

diameter continuous hinge rod







AMP-1006 ATHLETIC BOX LOCKERS

QUALITY, DURABILITY AND PRACTICAL STORAGE SOLUTIONS


CHOOSE FROM 16 COMBINATIONS TO MEET YOUR EXACT LOCKER NEEDS.





AMP COMBINATION P.E. LOCKERS

The design flexibility of our all-welded athletic lockers allows us to mix and match wardrobe lockers with box lockers to meet any configuration and/or ratio your facility may demand. Please contact our Sales Manager at 1-800-252-5633. We will help you to create an environment that will be both esthetically pleasing and functional.

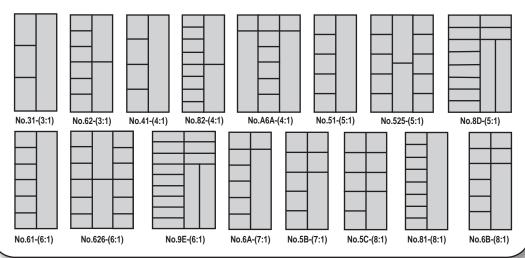

PERFECT FOR SWAT, POLICE, FIRE AND ALL EMERGENCY RESPONSE TEAMS

SECURITY













Full height piano hinge


Finish is standard powder-coat


✓ Full height door stiffeners

✓ Lower storage area with pull-out drawer

 Auto-Locking drawer is activated by upper doors

✓ Electrical Knockout in locker top - outlet and wiring by others





STANDARD BASE UNIT SIZES

Widths: 24", 30", 36" Depths: 30" 36"

Height: 18"



Standard electrical knockout at locker top right rear corner

OPTIONS

- PEGBOARD DOOR STIFFENER
- BOOT TRAY
- BODY ARMOR DRYING RACK
- PERSONAL ITEMS ACCESSORY TRAY
- LOUVERED DRAWER FRONT
- PERFORATED RE-ENFORCED TOP
- AIRFLOW GAP
- SHELVES SPACED AWAY FROM BACK FOR ADDED AIRFLOW



FEATURES

Depths: 18", 24"

Height: 72"

Widths: 24", 30", 36"

BODY CONSTRUCTION: 16 gauge, Unibody all-welded, sides, galvanneal corrosion resistant sheet steel.

BACK: 18 gauge.

BODY STYLES: Single tier, custom design for specialized use.

FEATURES: Security box (9" x 12") with keyed lock.

STANDARD UPPER UNIT SIZES

DOOR: 14 gauge louvered double doors with full-height welded in stiffener.

HINGES: Continuous piano type.

HANDLE: 3/16" Steel handle with high security 3-point turn handle latching and 3/8" diameter steel locking rods.

HOOKS: Two single wall hooks in wardrobe area plus single hook for opening below security box.

COAT RODS: One at vertical wardrobe section.

SHELVES: Two full-width at top, one partial shelf above security box.



TURNOUT GEAR FIREFIGHTER LOCKERS



perforated base and stainless steel coat rod.

foot locker.

metal base.

TURNOUT GEAR FIREFIGHTER LOCKERS

EMERGENCY RESPONSE ALL-WELDED LOCKERS





- Fully-framed, all welded, rugged construction.
- Maximum ventilation with expanded metal sides.
- ✓ Upper shelf provides storage for helmets and head gear.
- Without base models include ventilated bottom.
- ✓ Open-front provides quick access to gear and clothing.
- **✓** 721 Relay Red hammertone textured powder coat finish.



Optional Security Box uses Two heavy-duty 13 gauge 7-knuckle 3-1/2" hinges and a finger pull padlock hasp



Fixed hat shelf and stainless steel coat rod with 2 single prong hooks



Models with base are designed to be installed on the floor



Models without base have ventilated bottom plate and are designed to be installed on the wall with the wall mounting angle



GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Fully-framed all-welded construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 18 gauge solid back, 16 gauge galvanneal bottom.

DOORS (OPTIONAL): 14 gauge galvanneal steel. Security box door is solid. Full-height door is diamond perforated and includes 18 gauge door stiffener.

HANDLE/LATCHING: Optional security box has thru-the-door projecting Antimicrobial finger pull for protection against bacteria. Optional full-height door has gravity lift-type multi-point spring loaded latching and stainless steel recessed handle. Optional foot locker is prepared for padlocks only.

HINGES: Optional doors have heavy-duty 13 gauge 7-knuckle 3 1/2" hinges.

SHELVES: Two upper 16 gauge galvanneal steel shelves are standard.

HOOKS/COAT ROD: Four single prong hooks and stainless steel coat rod are standard.





TA-50 MILITARY GRADE STORAGE LOCKERS





Designed to be the solution to all your storage challenges, the TA-50 Equipment Storage Locker is secure, durable and is guaranteed to last the lifetime of your facility.



TA-50 MILITARY GRADE STORAGE LOCKERS









STANDARD



Rugged 3/16" Steel Handle is prepared for use with a padlock. Doors are pre-punched to accommodate a built-in combination or key lock if desired

STANDARD



Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges. Handle: 3-point turn-handle latching with 3/8" diameter locking rods for maximum security



TA-50 GEAR LOCKER AVAILABLE SIZES

Widths: 36-1/2", 42-3/8", 48-1/4"

Depths: 18", 22", 24" Heights: 74-3/4", 78", 84"

FEATURES

BODY CONSTRUCTION: Fully-framed all-welded construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge top, 18 gauge solid back and 16 gauge galvanneal bottom. Optional solid sides are available.

DOORS: 14 gauge diamond perforated doors with 18 gauge full-height door stiffener for both doors is standard. Louvered, Secure-Air-Flow and plain door styles are available

HANDLE: 3-point turn-handle latching

SHELVES: 16 gauge galvanneal upper shelf located 12" down from top, 16 gauge galvanneal lower shelf located 18" up from bottom and 16 gauge galvanneal bottom shelf

DOOR HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges

ACCESSORIES: Stainless steel coat rod located under upper shelf.




CHILDREN SAFEI

UNIBODY ALL-WELDED SCHOOL CUBBIES

The Art Metal Products Cubbie Locker line is designed to meet the needs of early childhood and elementary school classrooms. Combining our unibody all-welded locker construction and the added safety features required for this

specialized market, we offer four distinct models designed to meet any child's personal storage needs. AMP Cubbies are backed by our written lifetime Warranty.

ROUNDED CORNERS AND HEMMED EDGES!

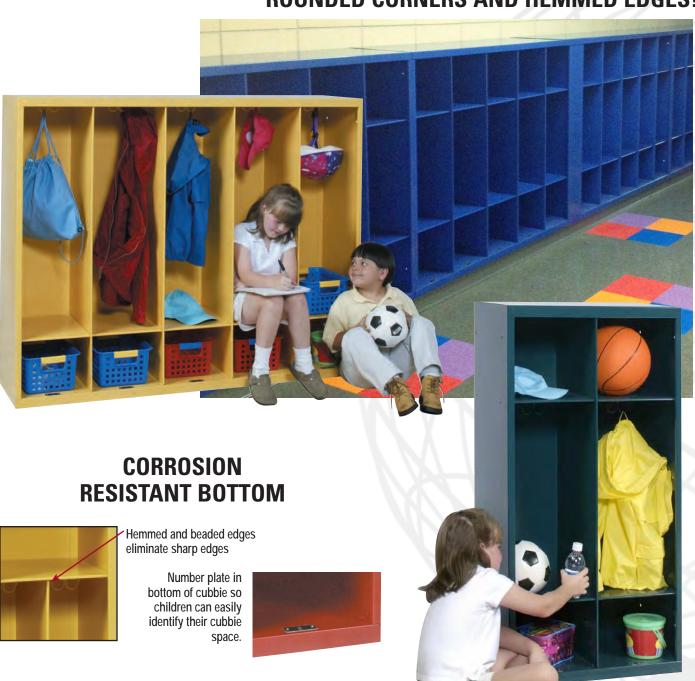

ROUNDED CORNERS AND HEMMED EDGES!





4 MODELS & 24 COLORS







MODEL SIZES	WIDTH	DEPTH	HEIGHT
Primary Cubbie	12", 15"	12", 16"	48"
Primary II Cubbie	12", 15"	12", 16"	48"
Primary Jr. Cubbie	12", 15"	12", 16"	24"
Backpack Cubbie	15", 18"	12", 16"	48"

FEATURES

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch.

BODY STYLES: Open design, 4 body styles.

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety.

NOTES: Easily secures to wall and floor for added safety, low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.







STANDARD KD WARDROBE LOCKERS







STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria



STANDARD



12 gauge latch hook is welded to frame



STANDARD



16 gauge continuous piano hinge



UPGRADE all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.

STANDARD KD WARDROBE LOCKER SIZES

TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
DOUBLE TIER	9" 12" 15" 18" 24" 9" 12" 15" 18" 9" 12" 15"	12" 15" 18" 21" 24" 12" 15" 18" 21" 24" 12" 15" 18" 21" 24"	36" 48" 60" 72" 30" 36" 20" 24"	36" 48" 60" 72" 60" 72" 60" 72"



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Secure-Air-Flow, Safety-View and diamond perforated door styles are available. See Standard Quiet lockers on page 38 for plain door option

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

SINGLE TIER Provides ample height

garments.

DOUBLE TIER

TRIPLE TIER

for hanging of full length

Where full length hanging of garments is not required

double tier lockers offer an economical alternative.

Triple tier lockers are ideal for use where storage of long garments is not required.

STANDARD KD BOX LOCKERS















STANDARD



Single-point thru-the-door projecting Antimicrobial finger pull padlock hasp for protection against bacteria. (shown with optional Padlock Strike Plate)

STANDARD



16 gauge continuous piano hinge



STRIKE PLATE Padlock Strike Plates for box doors protect finish from being marred by padlock



STANDARD KD BOX LOCKER SIZES				
TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
FOUR TIER	12" 15"	12" 15" 18"	15″ 18″	60" 72"
FIVE TIER	12" 15"	12" 15" 18"	12" 14.4"	60" 72"
SIX TIER	12" 15"	12" 15" 18"	12"	72"



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and

latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

NOTES: All production KD lockers are supplied without legs unless otherwise specified.

HOOKS: None







STANDARD KD SPECIALTY LOCKERS



When you need an economical multi-purpose, practical and space-saving locker solution.





FOUR-WIDE WALL MOUNT

Wall mount Lockers provide ample additional storage space for 4 persons. Wall mount lockers can be used as supplemental storage in combination with other lockers or in specific applications where floor space is limited and storage requirements must be met. 48" wide under-mount coat rod is optional.





16 gauge continuous piano hinge

STANDARD



Single-point thru-the-door projecting Antimicrobial finger pull padlock hasp for protection against bacteria. (shown with optional Padlock Strike Plate)



Optional Padlock Strike Plates for box doors protect finish from being marred by padlock

SIXTEEN-PERSON

An economical solution for personal security along and hanging space for full length garments. Ideal for student and teacher lounges, offices, commercial and retail establishments. Sixteen-Person lockers come with standard 6" high legs; 48" coat rod included



UPGRADE all body components to 16 gauge with18 gauge back. Recommended when placing heavy items in lockers such as backpacks.

STANDARD KD SPECIALTY LOCKER SIZES				
MODEL	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
Two-Person Duplex Sixteen-Person 4-Wide Wall Mount	15", 18" 15" 72" 48"	12", 15", 18", 21" 12", 15", 18", 21" 18" 18"	N/A 60", 72" 12" 12"	60", 72" 60", 72" 78" (with 6" legs) 14-3/4"

STANDARD KD SPECIALTY **LOCKERS**











Duplex & Two Person Lockers



DUPLEX

The most economical full length locker available, it conserves valuable floor space, yet provides ample height for hanging full length garments. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single hooks are standard in each wardrobe opening. Coat rods are optional for 18" and deeper models.





STANDARD Upper box door of Two-Person locker is opened from within

user's wardrobe compartment

STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

PROTECTION

STANDARD



12 gauge latch hook is welded to frame

STANDARD FOR BOX DOOR



16 gauge continuous piano hinge

TWO-PERSON

Two-Person lockers provide ample storage space for two users in a 15" or 18" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening are standard. Coat rods are optional for 18" and deeper.



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components.

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Secure-Air-Flow, Safety-View and diamond perforated door styles are available.

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- . 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher .

SHELVES: Hat shelf for single tier openings 60" and 72" high







STANDARD QUIET & ARTISAN QUIET KD LOCKERS

2 YEAR WARRANTY





STANDARD QUIET

Lockers are constructed just like our Standard K.D. lockers, except the door is furnished without louvers to limit air rush through the door, providing quiet operation. Perforations on upper and lower door flanges allow concealed ventilation.



DOOR FEATURES

Perforated top and bottom door flanges for all Standard Quiet and Whisper Quiet lockers allow for concealed ventilation



aesthetically appealing gravity latch locker.

acoustically filled sound deadening panel welded to the interior of the door face to further reduce decibel levels.

a quiet latching mechanism and an

UPGRADE to Artisan Quiet which adds

Double Tier 1-Wide



STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



UPGRADES all body components to 16 gauge with18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



FEATURES

BODY CONSTRUCTION: Knock down (KD) 24 gauge solid body components

D00RS: 16 gauge plain doors (18 gauge for 9" wide), sound deadening panel for Artisan Quiet lockers only

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HINGES: 16 gauge continuous piano type

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multipoint spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high
- Isolated latching mechanism for Whisper Quiet only

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.


HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Artisan Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design

HEAVY-DUTY CORRIDOR (HDC) KD LOCKERS

HEAVY-DUTY CORRIDOR lockers, commonly known as HDC lockers, are designed to include all the great features of our Standard KD wardrobe lockers; however, the door gauge is increased to 14 gauge which is 25% heavier than standard 16 gauge doors. To further increase door integrity, we offer our HDC Elite model which includes an 18 gauge full height door stiffener.



MP GRADE

9" wide Elite doors.

Upgrade to Elite Series HDC lockers which include a 3" wide 18 gauge full height door stiffener. A 1-1/2" wide stiffener will be furnished for







STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



UPGRADES all body components to 16 gauge with18 gauge back. Recommended when placing heavy items in lockers such as backpacks.





Single Tier 1-Wide

Double Tier 1-Wide

Triple Tier 1-Wide

FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HINGES: 16 gauge continuous piano type

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high







MAGNUM™ STUDENT **KD LOCKERS**

YEAR WARRANTY

The Magnum Student K.D. single-point (no moving parts latching mechanism) corridor locker is by far our quietest K.D. locker ever and an economical alternative to our top of the line all-welded AMP-1005 Bulldog locker.

STANDARD



Deep-drawn 304 stainless steel recessed handle with single-point latching

STANDARD



16 gauge continuous piano hinge

STANDARD



11 gauge single-point latch MIG welded to frame

STANDARD



Includes a 3" wide 18 gauge full height door stiffener, spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Magnum doors.



UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks. MAGNUM DOOR LINER

> 18 gauge full width door liner covers back of recessed handle. Built-in lock attaches to both door liner and recessed handle for maximum security and rigidity.

GREENGUARU

FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge plain doors with 18 gauge full-height door stiffener are standard. Louvered, Secure-Air-Flow and diamond perforated door styles are available

- 22

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet, 11 gauge latch hooks MIG welded to frame

HINGES: 16 gauge continuous piano type is standard. Heavy-duty 13 gauge 3-1/2" 7-knuckle hinges are available as an upgrade

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified.

HEAVY-DUTY VENTILATED (HDV) KD LOCKERS









2 YEAR WARRANTY

HDV Lockers are the perfect choice and offer exceptional value. When budget limitations do not allow for all-welded athletic lockers, Heavy-Duty Ventilated "HDV" lockers are the perfect alternative.





ELITE SERIES HDV LOCKERS include our 3" wide 18 gauge full height door stiffener welded to the inner door face providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Elite Series Wardrobe and 12" wide Elite Box Locker doors.

MAGNUM STUDENT SERIES HDV LOCKERS which include our deep-drawn

seamless stainless steel recessed handle with single-point latching, and a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Magnum Series doors.

STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge

STANDARD FOR BOX DOORS



Single-point thruthe-door finger pull padlock hasp is standard for HDV box doors 18" high and under



FEATURES

UP (HRADE

BODY CONSTRUCTION: (Wardrobe & Box lockers): Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Wardrobe Lockers (doors 20" and higher) - Deep-drawn seamless stainless steel recessed handle, Box lockers - Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher.
- 2 point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher
- Box lockers no hooks

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high **NOTES:** All production KD lockers are supplied without legs unless otherwise specified







SAFETY-VIEW™ LOCKERS

2 YEAR WARRANTY



The perfect solution when close monitoring of locker contents is desired.

PROTECTION

STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge,

SPECIAL FEATURES: Wardrobe: Two, high strength injection molded polycarbonate panels per door for content viewing Box: High strength injection molded polycarbonate doors for content viewing

DOOR: 16 gauge (For wardrobe doors only)

HINGES: Continuous piano type

HANDLE: (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock. Single-point projecting friction catch door pull prepared for both padlock or built-in lock is standard for box doors

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost.

SHELVES: Hat shelf is included in 60" and 72" high single tier lockers. notes: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201). All production lockers are standard with no legs unless otherwise specified. Safety-View doors are available as a retrofit to most lockers.

NOTES: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201). All production lockers are standard with no legs unless otherwise specified. Safety-View doors are available as a retrofit to most lockers.

(Also available in single and triple tier)


SAFETY-VIEW™ PLUS LOCKERS





See-thru doors



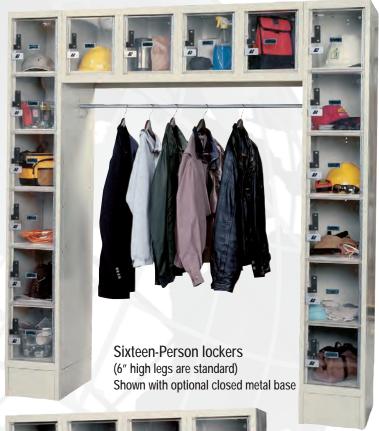



Four and Six Tier Lockers (also available in five tier)



STANDARD



Single-point thru-the-door projecting Antimicrobial finger pull padlock hasp for protection against bacteria.

4-wide wall mount lockers

STAI	STANDARD SAFETY-VIEW & SAFETY VIEW PLUS LOCKER SIZES							
		MODEL	OPENING WIDTH	OPENING DEPTH	OPENING HEIGHT	FRAME HEIGHT		
Safety-	View	Single Tier	12"	12", 15", 18"	60", 72"	72"		
Lockers	S	Double Tier	12"	12", 15", 18"	30", 36"	72"		
		Triple Tier	12"	12", 15", 18"	20", 24"	72"		
Safety-		Four Tier	12"	12", 15", 18"	18"	72"		
Plus Lo	ckers	Five Tier	12"	12", 15", 18"	12"	60"		
		Six Tier	12"	12", 15", 18"	12"	72"		
		Sixteen-Person	12"	18"	12"	78" with 6" legs		
		4-Wide Wall Mount	12"	18"	12"	14-3/4"		

STANDARD



16 gauge continuous piano hinge









304 STAINLESS STEEL LOCKERS

ATTRACTIVE DURABLE RUST RESISTANT 2 YEAR WARRANTY





The rich appearance and durable surface of 304 Stainless Steel Lockers make them the perfect locker solution for areas prone to rust and sanitation concerns and are ideal for food industry, pool area and outdoor.





STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD FOR BOX DOOR



legs

Single-point thru-the-door finger pull padlock hasp is standard for HDV box doors 18" high and under

GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock down (KD) with 24 gauge 304 stainless steel body components

DOORS: 16 gauge 304 stainless steel louvered doors are standard.

FRAME: 16 gauge 304 stainless steel frame with 16 gauge horizontal cross member between doors on double tier wardrobe lockers

HANDLE: Wardrobe doors have a deep-drawn seamless 304 stainless steel recessed handle. Box doors the projecting finger-pull handle is standard

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING (WARDROBE): 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

LATCHING (BOX): Single-point thru-the-door finger pull padlock hasp

HINGES: 2" long 16 gauge 5-knuckle stainless steel hinges. 3 hinges for doors 48" and higher and 2 for doors under 48" high.

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher. No hooks in openings less than 20" high.

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified



AMP LOCKER ACCESSORIES













SPECIFICATIONS

- 1 6" Closed Front Base (KD lockers only): Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers.
- 2 4" Continuous Z-Base (KD lockers only): Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers.
- **3 20 gauge Individual Slope Top (KD lockers only)**: Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers.
- **4 18 gauge Continuous Slope Top:** Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- **4 16 Gauge Continuous Slope Top:** Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- **5 Recessed Trim:** Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers.
- **6 Minimum Punched End Panel (KD lockers only):** Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends.
- **7 Boxed End Panel**: Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" 0.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 Fillers: Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated and finished to match lockers.









LOCKER BENCHES & PEDESTALS

PEDESTALS



4805 HEAVY DUTY STEEL PEDESTAL

Fabricated from 14 guage tube steel with 11 guage formed flanges.

Color: TAN



8032 ADJUSTABLE STEEL PEDESTAL

With cast aluminum base and concealed anchoring to floor.

Color: TAN



4810 EXTRA HEAVY-DUTY CAST IRON PEDESTAL

With 6" diameter top and bottom flanges with three anchoring holes.

Color: TAN



4820 ALUMINUM MOVEABLE PEDESTAL

Includes holes for optional permanent anchoring to floor. **Color: TAN**



4825 STAINLESS STEEL PEDESTAL

Fabricated from 16 guage stainless steel. Designed for moveable and fixed use.

Color: Unpainted

BENCHES

WHITE NORTHERN HARD WOOD

Locker Benches are 9-1/2" wide x 1-1/4" thick, made from laminated white northern hard wood, and finished with one coat, deeppenetrating hot sealer, and two coats of heavy body, high-impact, hot, hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 12'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

BENCH TOP LENGTH	3' - 8'	9' - 12'
PEDESTALS REQUIRED	2	3

Note: Bench top lengths over 12' will be supplied in sections



PHENOLIC

Locker Benches are 9-1/2" x 3/4" Thick, made from Wilsonart® phenolic in choice of 18 standard colors. See page 85 for color choices. Available in 1 foot incriments from 3' to 10'.

BENCH TOP LENGTH	3' - 5'	6' - 8'	9' - 10'
PEDESTALS REQUIRED	2	3	4

Pedestal space not to exceed 40" O.C.



PADLOCKS, BUILT-IN LOCKS & SPECIALTY LOCKS



AMP recommends MASTER® locks for use on all AMP Lockers.



Master Lock Co. Built-In Combination Locks

Available in spring-bolt and dead-bolt styles, are key controlled and include multiple combination settings.



ADA Compliant Version Available



Master Lock Co. Combination Padlocks

Available standard and master-keyed, Master Lock padlocks can be used on all locker types.





Master Lock Co. Built-In Key Locks

Available in spring-bolt and dead-bolt styles - Available in standard or master-keyed.



ADA Compliant Version Available



Hallowell DIGITECH™ Locks

Digitech™ electronic access locks can be programmed for shared or permanent use



ADA Compliant



SAFE-O-MAT® Built-In Coin, Token & Card Locks

Available in coin return and coin collect as well as token collect and card access styles.



Hallowell DIGITECH™ II RFID Locks

Digitech RFID electronic access locks can be programmed to work with most current RFID systems



ADA Compliant



Hallowell DIGITECH™ GL Locks

Digitech™ GL electronic locks are compatible with all AMP gravity lift-type latching lockers. Lock fits nicely in our recessed handle



ADA Compliant

NOTE: An ADA compliant lock must be used on any locker that is required to meet ADA guidelines.



DOOR VENTILATION OPTIONS



Plain Doors (Quiet)



Louvered Doors (Classic)



Louvered Doors (With Door Stiffener)



Diamond Perforated Doors (High Ventilation)



Diamond Perforated Doors (With Door Stiffener)



Secure-Air-Flow Doors (Mini Louvers)



Safety-View Plus Box Doors (See-thru Polycarbonate Door) 12" wide x 12" high and 12" wide x 18" high KD box doors only





Hybrid Red Oak Plain Door




Hybrid Red Oak Panel Door

MODULAR CUBIX LOCKERS







Stack Cubix lockers and easily attach adjacent units with pre-punched holes on top, sides and bottom. Or use the keyhole punched back for wall mounting. Ships Knock-Down ready-to-assemble,

- 3 Door types to choose from
- 3 Color choices
- 2 Handle/Lock choices







Safety-View Door with Key Cam Lock



Ventilated Diamond Perferated Locker Door



Plain Locker Door with Finger Pull Prepared for Padlock

Description	Overall Width	Overall Height	Overall Depth	Catalog No.	Color Selection
REPARED FOR PADLOCK (N	IOT INCLUDE	D)	A		
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL	MB, ME, PL
Safety-View Plus Door VITH BUILT-IN KEY LOCK (II	11-5/16 NCLUDED)	12-11/16	12	HC121212-1SVP	MB, ME, PL
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP-K	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL-K	MB, ME, PL
Safety-View Plus Door	11-5/16	12-11/16	12	HC121212-1SVP-K	MB, ME, PL



707 Marine blue

711 Light gray (PL)

GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock-down, 16 gauge **HOOKS:** None

HINGES: 16 gauge continuous piano hinge COAT RODS: None

DOORS: 18 gauge Solid (non-vented), Diamond Perforated, or Safe-

ty-View (clear)

SHELVES: None

LEGS: None



HANDLE/LOCKS: Finger pull latch prepared for padlock (sold separately), or Built-in key lock

43







BACKPACK / LAPTOP LOCKERS





SPECIAL FEATURES:

- Each locker has built-in channel for concealed aftermarket wiring to convert lockers to charging stations.
- Channel shall include punch outs for electrical outlet in each opening.
 Wiring and outlets by others.

3-Tier 1-Wide 3 Openings **POWERED:** Each locker has built-in channel for concealed after-market wiring to convert lockers to charging stations.

VENTILATED: Diamond perforated locker sides promote continuous air flow to cool chargers and components while keeping your items secure.



LOCK: Built-in Electronic Access Digitech H1 lock also acts as locker handle





BACKPACK / LAPTOP LOCKERS

WIDTH	DEPTH	HEIGHT	GROUPING	OPENINGS	UNASSEMBLED CAT NO.	ASSEMBLED CAT NO.	COLOR SELECTION
3-TIER				- W			
15	18	78	1-wide	3	UELBP1588-3PL	UELBP1588-3A-PL	PL
45	18	78	3-wide	9	UELBP3588-3PL	UELBP3588-3A-PL	PL
15	21	78	1-wide	3	UELBP1518-3PL	UELBP1518-3A-PL	PL
45	21	78	3-wide	9	UELBP3518-3PL	UELBP3518-3A-PL	PL
18	18	78	1-wide	3	UELBP1888-3PL	UELBP1888-3A-PL	PL
54	18	78	3-wide	9	UELBP3888-3PL	UELBP3888-3A-PL	PL
18	21	78	1-wide	3	UELBP1818-3PL	UELBP1818-3A-PL	PL
54	21	78	3-wide	9	UELBP3818-3PL	UELBP3818-3A-PL	PL
4-TIER					V 1	W /	
15	18	78	1-wide	4	UELBP1588-4PL	UELBP1588-4A-PL	PL
45	18	78	3-wide	12	UELBP3588-4PL	UELBP3588-4A-PL	PL
15	21	78	1-wide	4	UELBP1518-4PL	UELBP1518-4A-PL	PL
45	21	78	3-wide	12	UELBP3518-4PL	UELBP3518-4A-PL	PL
18	18	78	1-wide	4	UELBP1888-4PL	UELBP1888-4A-PL	PL
54	18	78	3-wide	12	UELBP3888-4PL	UELBP3888-4A-PL	PL
18	21	78	1-wide	4	UELBP1818-4PL	UELBP1818-4A-PL	PL
54	21	78	3-wide	12	UELBP3818-4PL	UELBP3818-4A-PL	PL

4-Tier 1-Wide 4 Openings





GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge perforated sides, 18 gauge solid back

DOORS: 14 gauge solid sheet steel

FRAME: 16 gauge welded frame

DOOR STRIKE: Continuous vertical door strike at both hinge and

latch side

HANDLE: DigiTech™ electronic, code access lock serves as handle

LATCHING: Single-point cam latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 1 fixed hat shelf per opening

HOOKS: none



CELL PHONE/TABLET LOCKERS







Prepared for Padlock



Keyed Cam Lock



Digitech H1™ Electronic Locks







MOBILE DEVICE LOCKERS

	OVERALL WIDTH	HEIGHT	DEPTH	GROUPING	OPENINGS PER GROUP	PADLOCK READY (PADLOCKS SOLD SEPARATELY) CAT NO.	WITH DIGITECH™ ELECTRONIC ACCESS LOCKS CAT NO.	WITH KEY CAM LOCK CAT NO.
	9	30 1/2	12	1-wide	5	UCTL192(30)-5A	UCTL192(30)-5A-E	UCTL192(30)-5A-K
l	27	30 1/2	12	3-wide	15	UCTL392(30)-5A	UCTL392(30)-5A-E	UCTL392(30)-5A-K

CLEAR	CLEAR	CLEAR
Opening	Opening	Opening
Width	Height	Depth
7 1/2	5 1/2	11



GENERAL SPECIFICATIONS

BODY CONSTRUCTION: 20 gauge cold rolled steel **HINGES:** 16 gauge continuous piano hinge

DOORS: 20 gauge solid (non-vented) COAT RODS: None

HANDLE/LOCKS Locks serve as door handle/pull

• PADLOCK Padlock hasp cam lock for padlocks by others

• KEY LOCK Cylinder cam locks

 DIGITECHTM ELECTRONIC LOCK: Pin code access electronic lock ships in temporary-use mode that can be programmed for permanent use

SHELVES: None

HOOKS: None

LEGS: None





AMP BULK STORAGE LOCKERS




AMP Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility.

Choose from in-stock or custom sizes to fit your needs.



- **✓** Single & Double Tier
- ✓ Economical
- **✓** Secure
- ✓ Durable
- √ Fast & Easy Installation
- **✓** Low Life-Cycle Cost
- ✓ Attractive
- ✓ User Friendly

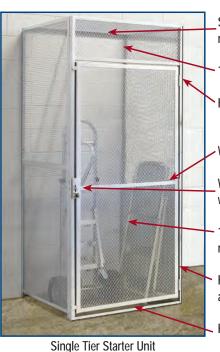

Shown with optional expanded metal top

13" transom

Heavy-duty 2-knuckle lift off hinge


Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and

Horizontal frame angles



Optional 16 gauge 1/2" expanded metal top makes for a very secure structure adding rigidity and ensuring a higher level of protection from theft



The Heavy-Duty 2-knuckle lift off hinges and door stops are welded to the frame for extra strength and security of contents,

imparting a more finished and attractive appearance to the unit.

Door handles are formed from one solid piece of steel and are welded to the frame for extra strength







NOTE: In the interest of safety, all lockers must be securely anchored to the floor and/or wall.

AMP BULK STORAGE LOCKERS


Custom Installations

AMP Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.





View of pipe through transom (or divider) with repair angle.



Showing cut out (with repair angles) to allow for interfering duct.

Repair Angles

REPAIR ANGLE 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

Blue part number denotes in stock sizes. Custom sizes are also available.



BULK STORAGE LOCKER STOCK SIZES

Width 36" 48" Depths 36" 48" 60" Height 90"

Standard Sizes available in single and double tier configurations.

*Custom sizes are also available.

OPTIONS

TOPS are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

SHELVES are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

BACKS are required for back-to-back installations or where a single row is set away from a wall.

BOTTOMS are recommended for use on all single or double tier lockers if dampness prevails.

			STARTER UNITS		ADDER	UNITS
W	D	Н	Part No. (Right Hinged)	Part No. (Left Hinged)	Part No. (Right Hinged)	Part No. (Left Hinged)
SINGLE	TIER					
36 36	36 48	90 90	BSL363690-R-1S-PL BSL364890-R-1S-PL	BSL363690-L-1S-PL BSL364890-L-1S-PL	BSL363690-R-1A-PL BSL364890-R-1A-PL	BSL363690-L-1A-PL BSL364890-L-1A-PL
36 48 48	60 36 48	90 90 90	BSL366090-R-1S-PL BSL483690-R-1S-PL BSL484890-R-1S-PL	BSL366090-L-1S-PL BSL483690-L-1S-PL BSL484890-L-1S-PL	BSL366090-R-1A-PL BSL483690-R-1A-PL BSL484890-R-1A-PL	BSL366090-L-1A-PL BSL483690-L-1A-PL BSL484890-L-1A-PL
48 DOUBL	60 E TIED	90	BSL486090-R-1S-PL	BSL486090-L-1S-PL	BSL486090-R-1A-PL	BSL486090-L-1A-PL
36 36 36 48 48	36 48 60 36 48	45 45 45 45 45	BSL363690-R-2S-PL BSL364890-R-2S-PL BSL366090-R-2S-PL BSL483690-R-2S-PL BSL484890-R-2S-PL	BSL363690-L-2S-PL BSL364890-L-2S-PL BSL366090-L-2S-PL BSL483690-L-2S-PL BSL484890-L-2S-PL	BSL363690-R-2A-PL BSL364890-R-2A-PL BSL366090-R-2A-PL BSL483690-R-2A-PL BSL484890-R-2A-PL	BSL363690-L-2A-PL BSL364890-L-2A-PL BSL366090-L-2A-PL BSL483690-L-2A-PL BSL484890-L-2A-PL
48 ACCES	60 SORIES	45 FOR BULI	BSL486090-R-2S-PL K STORAGE	BSL486090-L-2S-PL	BSL486090-R-2A-PL	BSL486090-L-2A-PL
TOP PA	NFIS					
36 36 36 48	36 48 60 36		4803636PL 4803648PL 4803660PL 4804836PL	(Single Tier: Overall Height 90" Opening Height: 75-1/2"	
48 48 48	48 60		4804836PL 4804848PL 4804860PL	_	Oouble Tier:	
FRONT	EXTENS	ION PAN	IELS		Overall Height 90"	
6 12		90 90	4600690PL 4601290PL		Jpper Opening Height: 31-1/2" ower Opening Height: 42"	
18 24		90 90	4601890PL 4602490PL	• [Doors: available right-hand or	left-hand
BACK F	PANELS			h	ninged	
36 48		90 90	4703690PL 4704890PL		UL GREE	ENGUARD
REPAIR 36	ANGLE	S	20100		C AULU	GERTIFIED



24/7

The locker features the NEW Hallowell DIGITECH™ H1 digital lock, a slimline ultra modern look and simple to operate.

Easily Manage Tenant Package Delivery

CONCIERGE...

- 1. Receives package for tenant
- 2. Places package in locker
- 3. Locks door using 4-digit PIN
- 4. Texts or emails Locker Number and PIN to Tenant

TENANT, AT HIS/HER CONVENIENCE...

- 1. Enters PIN into lock of appropriate locker
- 2. Removes package
- 3. Closes door of now empty locker, PIN is erased

· Ships fully-assembled

· DigiTech H1 electronic locks

LOCKER FEATURES

- · All-Welded Unibody Construction
- · 14 Gauge solid steel doors with 16 Gauge piano hinge
- · 16 Gauge solid steel body & 18 Gauge steel backs

LIGHT GRAY (PL)

POPULAR LOCKER CONFIGURATIONS



HEPL642-11 2-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (2) 18" x 72" doors

4-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (4) 18" x 36" doors

HEPL842-33 6-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (6) 18" x 24" doors

HEPL842-55 36" x 24" x 72" Locker (6) 18" x 8" doors above

10-DOOR PARCEL LOCKER (4) 18" x 24" doors at bottom

HEPL842-77 14-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (12) 18" x 8" doors above (2) 18" x 24" doors at bottom

HEPL842-99 18-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (18) 18" x 8"doors

24/7 PARCEL LOCKER LETS YOU RECEIVE AND PICK UP ANYTIME.



DIGITECH H1 ELECTRONIC LOCKS

SECURITY CODE LOCK FEATURES

· 8-digit master and sub-master codes for two levels of management security.

CR123 LITHIUM BATTERY (INCLUDED)

- · Provides over 10,000 normal uses.
- · LED's Flash to indicate low battery level

MASTER KEY

· Locker can be opened with master key if batteries are exhausted.

PERMANENT MODE TOO

· User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.





· Secure pop-out turn handle (flush when locked)













GENERAL SPECIFICATIONS

BODY: All-Welded Unibody Construction 16 gauge solid body with 18 ga backs

DOORS: 14 ga solid doors with 16 ga piano hinge

LOCKS: DigiTech horizontal electronic locks Ships fully-assembled, locks installed in field

COLOR: Light Gray (PL)

AMP PORTABLE GATES





AMP PORTABLE GATES

ARE IDEAL FOR:

- SCHOOLS
- SHOPPING MALLS
- RECREATION CENTERS
- FACTORIES
- LIBRARIES
- HOSPITALS
- OFFICE BUILDINGS
- FINANCIAL INSTITUTIONS
- THEATERS
- MUSEUMS



SECURITY • TRAFFIC CONTROL • PORTABILITY

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are valuable for special installations
- Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- Two or more gates can be joined together for large expanse

Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions. Connect multiple gates together for wider applications.

AMP F	AMP PORTABLE GATES						
Model	For Openings	Collapsed Size	Height	Weight (lbs)			
P601-06	3'-6" to 6'-0"	19" x 30"	6'-6-1/2''	193			
P601-09	6'-0'' to 9'-0''	19" x 30"	6'-6-1/2''	197			
P601-12	7'-0" to 12'-0"	24" x 30"	6'-6-1/2''	254			
P601-15	11'-0" to 15'-0"	30" x 30"	6'-6-1/2''	311			
P601-18	13'-0" to 18'-0"	30" x 30"	6'-6-1/2''	374			
PG-CL	Cylindor Locks						
PG-FAA	Floor Anchors						
PG-A	Additional Anchors						

EXCLUSIVE AMP PRESSURE LOCK SYSTEM WORKS LIKE THIS:

- 1. Raise unit retainer channel to vertical position and secure
- 2. Extend gate until rubber bumpers touch both walls
- Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket
- 4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin. Pin need not engage a hole in female lock channel
- Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position













- Custom Wood Lockers
- Sport Lockers
- Country Club Lockers
- Fitness Center Lockers
- Health Spa Lockers















IDEAL CHOICE FOR YOUR NEXT WOOD LOCKER PROJECT

Bring Prestige to your Organization with Custom Wood Lockers

Create a memorable environment for your current members, impress your potential members or dazzle day-use customers with AMP Custom Recruiter Wood Lockers. Our lockers bring an upscale and luxurious design to your locker room with a very reasonable lifecycle cost. We use the finest materials, and

finish our lockers with a two coat, catalyzed, clear cabinet lacquer to keep the finish looking like new year-in and year-out. Each locker is hand crafted by expert craftsmen using state-of-the-art equipment to create an heirloom quality masterpiece.













REINFORCE YOUR COMMITMENT TO YOUR PLAYERS!

Equip them with the industry's finest all-wood sport lockers.

AMP Recruiter™ custom wood sport lockers are made to order, and offer a variety of different options allowing you to tailor your locker room to your team's specific requirements.





Optional LED Lighting under locker top and/or under shelf



Optional USB & 110 power outlet inside upper security box



Optional duel fan ventilation system for forced air ventilation of foot locker



CUSTOM WOOD SPORT LOCKERS

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.



FIVE SIDE OPTIONS



Set Back Sides



Full Curve Sides



Full Sides



Slant Sides



Half Curve Sides

OPTIONAL FEATURES



Name plate holders



Shoulder pad rack



Shoulder pad & Helmet rack



Foot locker front panel mesh insert



Engraved team logo on security box door.



Padded Seat Cushion



Optional mesh expanded metal side inserts for additional ventilation



Optional Bat / Lacrosse Stick Caddy

Electronic locks

- · Built in combination lock
- Mechanical lock







Introducing our New Recruiter™ Set-Back QUICK-SHIP Design

The beauty is in the details...

These lockers are high quality fine furniture. We take special pride in ensuring that each locker is a true work of art. All are made in our own manufacturing plant and shipped directly to you.

QUICK-SHIP LOCK OPTIONS



STANDARD PADLOCK CAM HASP



BUILT IN COMBINATION LOCK



DIGITECH-H1™ ELECTRONIC LOCK



24" & 30" Wide Models Available From Quick-Ship









Stock Locker: 24"/30"W x 24"D x 84"H Starter Unit Shown Includes Two Finished End Panels

OPTIONAL ADD ON ACCESSORIES



Seat Cushion (Black) SC2424BK SC3024BK



Shoulder Pad Rack SPHR14R



Shoulder Pad & Helmet Rack SPHR18R



Name Plate Holder NPH-0212S (12" wide) NPH-0218S (18" wide)



USB Outlet in Security Box USB-4 USB-4-110



UV Full Color Print on security box door RLDOORLOGO

ADDITIONAL QUICK-SHIP ACCESSORIES

(Additional Lead-time Apply)

- Logo UV Full Color Print Box Door, RLDOORLOGO
- End Filler 15", RLEF1584

• Corner Filler 15" x 15", RLCF151584

OPTIONAL WOOD CHOICES ARE AVAILABLE. Go to www.artmetalproducts.com or Call 1-800-252-5633 (Additional Lead-time Apply)

Starter units include (2) finished end panels to be used at row ends Adder units do not include finished end panels Order (1) Starter unit for each straight run of lockers and Adder units to fill out the run

SIDE PROFILE OPTIONS

(Additional Lead-time Apply)



STRAIGHT **SLANT**

HALF CURVE FULL CURVE

ADDER	CAT	NO
/ LDD LIL	0, 11.	140.

WIDTH	DEPTH	HEIGHT	STARTER CAT. NO.	ADDER CAT. NO.			
RECRUI	TER 2 WI	TH COMBIN	ATION LOCK HASP				
24	24	84	R2SBS242484BNPLFSGRO-S	R2SBS242484BNPLFSGRO-A			
RECRUI	RECRUITER 2 WITH BUILT IN COMBINATION LOCK						
24	24	84	R2SBS242484BNBCFSGRO-S	R2SBS242484BNBCFSGRO-A			
RECRUIT	ER 2 WIT	H DIGITECH	™ H1 ELECTRONIC LOCK				
24	24	84	R2SBS242484BNDTFSGRO-S	R2SBS242484BNDTFSGRO-A			
END FIL	LER PANI	LS					
15	-	84	RLEF1584				
CORNER	R FILLERS						
24	24	84	RLCF242484				
36	36	84	RLCF363684				

STANDARD LOCKER FEATURES

- FURNITURE GRADE RED OAK HARDWOOD Two Coats of Formaldehyde-Free Catalyzed Conversion Varnish for Excellent Moisture Resistance
- MODERN CONTOUR EDGES WITH WOOD EDGE BANDING
- UPPER SECURITY BOX
- THREE LOCK OPTIONS
- LOWER FOOT LOCKER/SEAT
- STAINLESS STEEL COAT ROD

- THREE STAINLESS STEEL HOOKS
- STARTER/ADDER UNIT CONFIGURATIONS
- 24" X 24" X 84" AND 30" X 24" X 84"
- SHIPS FULLY-ASSEMBLED
- INCLUDES TOE KICK MATERIAL
- 2 X 4 SUB-BASE BY OTHERS



Art Metal Products





SOLID PLASTIC LOCKERS



Aquamax Solid Plastic Lockers are Ideal for applications where high humidity, moisture and water are present. Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.







WARDROBE DOORS:Projecting solid plastic handle with lift-type latching

Z-Tier: Multi-height storage with extended hanging space

STANDARD



BOX LOCKER DOORS: Single-point thru-thedoor projecting friction catch door pull with padlock hasp

Mildew and Odor Resista	nt
Graffiti Resistant	

Chemical Resistant

AQUAMAX	SIZES		
MODEL	WIDTH	DEPTH	HEIGHT
1-Tier	12"	18"	72"
2-Tier	12"	18"	36"/ 72"
3-Tier	12"	18"	24"/ 72"
6-Tier	12"	18"	12"/ 72"
Z-Tier	12"	18"	42"/ 72"

FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge, High density (HDPE) Polyethylene plastic, 3/8" thick body panels

Available in single, double, triple, four, five, six and "Z" tier configurations

DOORS: 1/2" thick solid HDPE plain doors with perimeter ventilation

HANDLE: Wardrobe doors have a projecting solid plastic lift handle. Box doors 18" and under include a single-point projecting padlock hasp with door pull

LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers

HINGES: Continuous aluminum hinge is powder coated

HOOKS: Two stainless steel single prong hooks in single and double tier

SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high

NOTES: All doors prepared for use with padlock locks not included). Production locker body components are available in white only. See color selections on page 85

ANTIMICROBIAL HDPE PLASTIC LOCKERS



Solid Plastic (HDPE) Production Lockers are perfect for use in wet environments, such as showers areas, and pools.



HDPE CONTAINS A SPECIALLY FORMULATED ANTIMICROBIAL AGENT THAT PERMANENTLY RESISTS THE GROWTH OF BACTERIA, YEAST AND MILDEW.



MedSafe AquaMax lockers are manufactured with high density polyethylene (HDPE), containing a specially formulated ANTIMICROBIAL agent that permanently resists the growth of bacteria, mold, yeast and mildew. This special feature, combined with all the great features of our AquaMax lockers, make these lockers ideal for use in medical, educational, retail and manufacturing environments.



STANDARD SIZES

WIDTH 12" 15" 18" DEPTH 12" 15" 18" HEIGHT 60" 72"

Available in single, double, and "Z" tier configurations

FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge, High density (HDPE) Polyethylene plastic, 3/8" thick body panels

DOORS: 1/2" thick solid HDPE plain doors with perimeter ventilation

HANDLE: Wardrobe doors have a projecting solid plastic lift handle. Box doors 18" and under include a single-point projecting padlock hasp with door pull

LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers

HINGES: Continuous aluminum hinge is powder coated Hooks: Two stainless steel single prong hooks in single and double tier

SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high

NOTES: All doors prepared for use with padlock locks not included). Production locker body components are available in white only.




VERSAMAS SOLID PHENOLIC LOCKERS

VersaMax[™] Solid Phenolic lockers are engineered to the same high level of integrity found throughout our AMP locker line.

The unique qualities of phenolic resin offer many value added benefits:

- ✓ Environmentally Smart
- ✓ Moisture Resistant, perfect for wet or damp areas
- ✓ Mold and mildew resistant
- **✓** Many colors and finish options
- ✓ Laminate surface is graffiti and scratch resistant

SOLID PHENOLIC LOCKERS

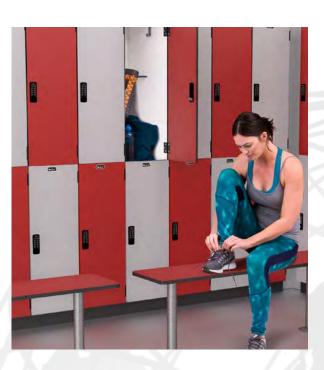





Phenolic Sport lockers are available in various standard styles designed to meet the needs of today's versatile athletes. Sport lockers can also be customized to meet your team's specific needs.

SOLID PHENOLIC LOCKERS

Fully assembled single unit construction. End panels and filler panels are recommended for a finished installation. Designed with mortise &








Double Tier

Triple Tier









• Four Tier lockers provide ample storage for larger personal items like backpacks, totes, etc.





Various locking options:





Padlock Hasp

Electronic Locks





Built-In Key Locks

RFID Locks





Built-In Combination Locks

Mechanical Shared Use Locks





Coin or Token Locks

-	1
-	1
	1
	1
1	1
Five Tier	Six Tier

Single Tier

- Five Tier lockers are available in 12" and 14.4" high openings allowing for storage of personal belongings
- · Six Tier lockers are our most economical storage solution offers storage of purses, bags, phones and other smaller personal items



• Z-Style Lockers are the perfect compromise between single and double tier lockers offering the perfect solution when space is at a premium, but hanging of longer garments is needed.

STOCK PHENOLIC LOCKER SIZES Width Depth Opening Height Tier **Overall Height** Single Tier 12 72 72 18 **Double Tier** 12 72 18 36 Six Tier 72 12 18 12 **Z-Tier** 72

GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Phenolic construction, Sides and backs are 5/16" thick. Tops, bottoms and shelves are 3/8" thick.

DOORS: 1/2" thick solid phenolic with perimeter ventilation.

SHELVES: Hat shelf for single tier 60" & 72" lockers

	PRODUC	TION PHENOL	IC LOCKER SI	ZES	
	Tier	Width	Depth	Opening Height	Overall Height
3	Single Tier	9", 12", 15", 18", 24"	12", 15", 18", 20", 24"	36", 48", 60", 72"	36", 48", 60", 72"
	Double Tier	9", 12", 15", 18", 24"	12", 15", 18", 20"	18", 24", 30", 36"	36", 48", 60", 72"
	Triple Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 20", 24"	36", 60", 72"
	Four Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 15", 18"	48", 60", 72"
	Five Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 14.4"	60", 72"
	Six Tier	9", 12", 15", 18"	12", 15", 18", 20"	12"	72"
	Z-Style	12", 15", 18"	12", 15", 18", 20"	36/24", 42", /30"	60", 72"
	Sport	18", 24"	18", 20", 24"	N/A	72", 84"





OPEN SHELVING-MEDIUM, HEAVY AND EXTRA HEAVY-DUTY





Open Starter Units Include:

Two beaded front posts, two angle back posts, one pair of back sway braces, two pair of side sway braces and shelves with shelf clips applicable to unit ordered.



Open Adder Units Include:

One beaded front post, two angle back posts, one pair of back sway braces, one pair of side sway braces and shelves with shelf clips applicable to unit ordered.



Box beam adjustable shelves











HEAVY DUTY SHELVES

- Tubular flange front and rear for greater strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accep shelf dividers
- Uses four one piece shelf clips per shelf
- Can be installed together with both Beaded Front and Angle Back Posts as well as T-Posts and H-Posts



ANGLE BACK POSTS & T-POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired

CLOSED SHELVING-MEDIUM. HEAVY AND EXTRA HEAVY-DUTY





Closed Starter Units Include:

Two beaded front posts, two angle back posts, one set of back panels, two sets of side panels and shelves with shelf clips applicable to unit ordered.



Closed Adder Units Include:

One beaded front post, two angle back posts, one set of back panels, one set of side panels and shelves with shelf clips applicable to unit ordered.











Box beam adjustable shelves



Base strip closes bottom to prevent debris accumulation



Optional swinging doors allow cabinet-style storage



Shelf dividers for organized storage



BEADED FRONT POSTS

Beaded for strength

 Flush to permit straight-in/ straight-out shelf installation, shelf changing and shelf loading. No tilting needed

Get the full use of shelf area

• Punched on 1-1/2" centers to allow positioning of one shelf independent of other shelves



H-POSTS

· Designed for high-density applications

 More than twice the capacity of standard posts • Used at front and back

• Used with standard Hi-Tech components



ONE PIECE SHELF CLIP

Each shelf requires four of these sturdy and compact clips

Clips key firmly into post slots to hold shelves securely in place

Fits Beaded Front, Angle Back Posts, T-Posts and H-Posts

Provides independent shelf positioning on 1-1/2" centers

Non-Intrusive clip sits flush with inside edge of front posts





OPEN SHELVING-MEDIUM, HEAVY AND EXTRA HEAVY-DUTY





OPEN TYPE ADDER



5 SHELVES



6 SHELVES



8 SHELVES

W	D	н		5-Shelf Unit SKU No.	6-Shelf Unit SKU No.	8-Shelf Unit SKU No.	Shelf Capacity*
Medium-				5115 H5.	Onto no.	Onto no.	Capacity
36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	4510-12 A4510-12 4510-18 A4510-18 4510-24 A4510-24	4511-12 A4511-12 4511-18 A4511-18 4511-24 A4511-24	4513-12 A4513-12 4513-18 A4513-18 4513-24 A4513-24	500* 500* 500* 500* 500*
48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87 87	Starter Adder Starter Adder Starter Adder	4710-12 A4710-12 4710-18 A4710-18 4710-24 A4710-24	4711-12 A4711-12 4711-18 A4711-18 4711-24 A4711-24	4713-12 A4713-12 4713-18 A4713-18 4713-24 A4713-24	375* 375* 375* 375* 350* 350*
Heavy-D	uty						
36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	5510-12 A5510-12 5510-18 A5510-18 5510-24 A5510-24	5511-12 A5511-12 5511-18 A5511-18 5511-24 A5511-24	5513-12 A5513-12 5513-18 A5513-18 5513-24 A5513-24	800* 800* 800* 800* 800* 800*
48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	5710-12 A5710-12 5710-18 A5710-18 5710-24 A5710-24	5711-12 A5711-12 5711-18 A5711-18 5711-24 A5711-24	5713-12 A5713-12 5713-18 A5713-18 5713-24 A5713-24	400* 400* 450* 450* 500* 500*
Extra He	avy-Dut	ty Duty					
36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	7510-12 A7510-12 7510-18 A7510-18 7510-24 A7510-24	7511-12 A7511-12 7511-18 A7511-18 7511-24 A7511-24	7513-12 A7513-12 7513-18 A7513-18 7513-24 A7513-24	1100* 1100* 1200* 1200* 1250* 1250*
48 48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87 87	Starter Adder Starter Adder Starter Adder	7710-12 A7710-12 7710-18 A7710-18 7710-24 A7710-24	7711-12 A7711-12 7711-18 A7711-18 7711-24 A7711-24	7713-12 A7713-12 7713-18 A7713-18 7713-24 A7713-24	750* 750* 900* 900* 900* 900*

Additio	onal Shelves	Medium-Duty	Heavy-Duty	Extra Heavy-Duty	
36	12	5135-3612	5138-3612	5139-3612	See Above
36	18	5135-3618	5138-3618	5139-3618	See Above
36	24	5135-3624	5138-3624	5139-3624	See Above
48	12	5135-4812	5138-4812	5139-4812	See Above
48	18	5135-4818	5138-4818	5139-4818	See Above
48	24	5135-4824	5138-4824	5139-4824	See Above

^{*}Shelf capacity based on factor of 1.65.

NOTES: Color for all components 725 Hallowell Gray

OPEN UNITS:

Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.

CLOSED SHELVING-MEDIUM, HEAVY AND EXTRA HEAVY-DUTY



	w	D	н		5-Shelf Unit SKU No.	6-Shelf Unit SKU No.	8-Shelf Unit SKU No.	Shelf Capacity*
П	Medium	-Duty						
	36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	4520-12 A4520-12 4520-18 A4520-18 4520-24 A4520-24	4521-12 A4521-12 4521-18 A4521-18 4521-24 A4511-24	4523-12 A4523-12 4523-18 A4523-18 4523-24 A4523-24	500* 500* 500* 500* 500* 500*
	48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	4720-12 A4720-12 4720-18 A4720-18 4720-24 A4720-24	4721-12 A4721-12 4721-18 A4721-18 4721-24 A4721-24	4723-12 A4723-12 4723-18 A4723-18 4723-24 A4723-24	375* 375* 375* 375* 350* 350*
	Heavy-D	Outy						
	36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	5520-12 A5520-12 5520-18 A5520-18 5520-24 A5520-24	5521-12 A5521-12 5521-18 A5521-18 5521-24 A5521-24	5523-12 A5523-12 5523-18 A5523-18 5523-24 A5523-24	800* 800* 800* 800* 800*
	48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	5720-12 A5720-12 5720-18 A5720-18 5720-24 A5720-24	5721-12 A5721-12 5721-18 A5721-18 5721-24 A5711-24	5723-12 A5723-12 5723-18 A5723-18 5723-24 A5723-24	400* 400* 450* 450* 500* 500*
	Extra He	eavy-Dut	y Duty					
	36 36 36 36 36 36	12 12 18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder Starter Adder	7520-12 A7520-12 7520-18 A7520-18 7520-24 A7520-24	7521-12 A7521-12 7521-18 A7521-18 7521-24 A7521-24	7523-12 A7523-12 7523-18 A7523-18 7523-24 A7523-24	1100* 1100* 1200* 1200* 1250* 1250*
	48 48 48 48 48 48	12 12 18 18 24 24	87 87 87 87 87 87	Starter Adder Starter Adder Starter Adder	7720-12 A7720-12 7720-18 A7720-18 7720-24 A7720-24	7721-12 A7721-12 7721-18 A7721-18 7721-24 A7721-24	7723-12 A7723-12 7723-18 A7723-18 7723-24 A7723-24	750* 750* 900* 900* 900* 900*

A	Addition	al Shelves	Medium-Duty Heavy-Duty Extra Heavy-Duty	
	36 36 36	12 18 24	5135-3618 5138-3618 5139-3618	See Above See Above See Above
	48 48 48	12 18 24	5135-4818 5138-4818 5139-4818	See Above See Above See Above

^{*}Shelf capacity based on factor of 1.65.

NOTES: Color for all components 725 Hallowell Gray

assembly and 5-8 shelves.





TYPE STARTER



CLOSED TYPE ADDER



5 SHELVES



6 SHELVES








SYSTEM LAYOUT INFORMATION

STANDARD AND H-POST

Standard Shelving with Hi-Tech Shelves

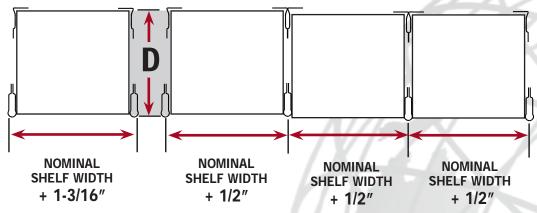


PLUS ADD 3/4" PER ROW

FOR "D" - SINGLE FACE ADD 3/16" TO NOMINAL SHELF DEPTH FOR "D" - DOUBLE FACE ADD 3/8" TO NOMINAL SHELF DEPTH

H-Post Shelving with Hi-Tech Shelves

See pages 62-63

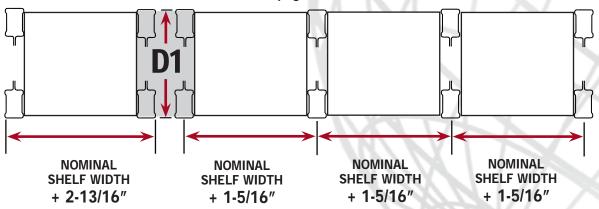

PLUS ADD 1-1/2" PER ROW

FOR "D1" - SINGLE FACE ADD 5/16" TO NOMINAL SHELF DEPTH

FOR "D1" - DOUBLE FACE CLOSED MODELS ADD 13/16" TO NOMINAL SHELF DEPTH

FOR "D1" - DOUBLE FACE OPEN MODELS ADD 29/32" TO NOMINAL SELF DEPTH

NOTE: SHELF WIDTH IS 5/16" UNDER NOMINAL


NOTE: Width of posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width.

Check "D" and "D1" dimensions for depth/creepage.

UNIT LOAD CAPACITY **INFORMATION**



1.65 SAFETY FACTOR

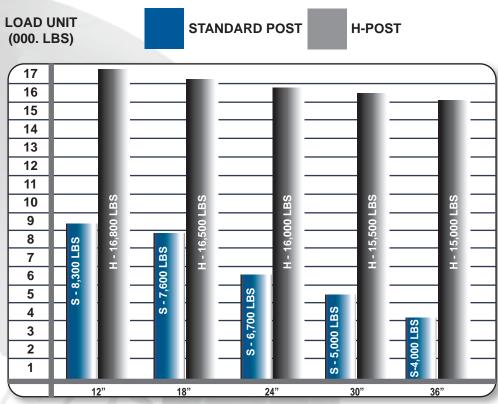

Before selecting type of post, consideration should be given to loads to be carried. Use the formula below to get unit load, then select post type from table.

 $(B-2) \times A$ = Unit Load

= Shelf Load

= Shelves per unit (includes top and bottom shelves)

WARNING:

Use H-Posts for:


- High-rise applications.
- Pass-through applications regardless of load.
- High-density, multi-level applications.



TYPICAL SWAY BRACE INSTALLATIONS FOR SEISMIC ZONE NO. 0

Standard Shelving (Beaded Front Posts) High-Density Shelving (H-Posts)



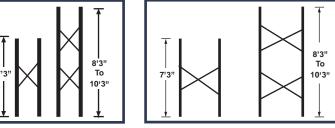

Use of Side Sway Braces (Part No. 5344 - Standard Shelving) (Part No. 5341-High-Density Shelving) and high density shelving

Use of Back Sway Braces (Part No. 5342) for both standard

NOTES: 1-When splicing posts for increased heights or for multi-level shelving, use the proper number of braces required for the height of the posts being added. Example: a 10'-3" model increased another 10'-3" in height would require 4 sets of side sway braces and 4 sets of back braces. 2-For additional bracing requirements in Seismic Zones No. 2, 3 and 4, consult the Hallowell Applications Engineering Department.







DURATECH™ PASS THRU STEEL SHELVING

PASS-THRU STEEL SHELVING REQUIRES NO CROSS BRACES UNIQUE DESIGN CREATES A VERY STRONG UNIT!

DuraTech is AMP's newest line of pass-thru steel shelving requiring no cross braces allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers the most versatility and durability for today's modern facilities.

OUR COMPLETE LINE OF SHELVING IS DESIGNED AND ENGINEERED TO THE HIGHEST STANDARDS.

Our Unique Grip Nut Design Creates A Very Strong And Rigid Structure



FEATURES

- · Access from all 4 sides.
- Top and bottom firmly attached with steel-grip nuts for maxium strength
- Available in 5, 7 and 8 shelf models.
- Four angle posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.
- Each intermediate shelf uses four sturdy and compact clips.
- Clips key firmly into post slots to hold shelves securely in place.
- Provides independent positioning of intermediate shelves on 1-1/2" centers.
- Bottom shelf is positioned to prevent debris from collecting beneath unit.



DARK GRAY (HG)



360° Access - No Cross Braces Creates a more efficient storage system!



ADJUSTABLE, STRONG, SECURE & STABLE



Top and bottom shelves attach with bolts at each corner providing a strong and rigid structure



Angle posts are roll formed into a unique angle shape for maximum strength. Leg is punched on 1-1/2" centers to allow independent intermediate shelf adjustment

Fully Adjustable Intermediate Shelves with fixed top and bottom for a strong unit That DOES NOT require CROSS Braces



Bottom shelf is positioned to prevent debris from collecting beneath unit



Intermediate shelves have a tubular flange at the front and rear, and exclusive triple bend sides for added strength.



5-SHELF UNIT 3-adjustable shelves





Top and bottom shelves are triple flanged at all four sides and bolted to angle posts at all four corners for maximum rigidity, durability and stability.



Compression Shelf Clip for intermediate shelves



7-SHELF UNIT 5-adjustable shelves



8-SHELF UNIT 6-adjustable shelves

w	D	Н	* Capacity Per Shelf	5-Shelf Catalog No.	7-Shelf Catalog No.	8-Shelf Catalog No.					
36" WIDE UNITS											
36	12	87	800	DT5510-12	DT5512-12	DT5513-12					
36	18	87	800	DT5510-18	DT5512-18	DT5513-18					
36	24	87	800	DT5510-24	DT5512-24	DT5513-24					
48" V	VIDE U	NITS									
48	12	87	400	DT5710-12	DT5712-12	DT5713-12					
48	18	87	450	DT5710-18	DT5712-18	DT5713-18					
48	24	87	500	DT5710-24	DT5712-24	DT5713-24					

All Units Include: Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.





RIVETWELL™ BOLTLESS SHELVING

Boltless shelving is designed to maximize storage space and minimize installation set-up time.

All components are engineered to attach snugly to one another without the use of loose fasteners. This unique design has rivets which are factory attached to all left-to-right and front-to-back beams. The rivets align with keyhole slots in the vertical posts. Once tapped into place using a standard rubber mallet, the units are tightly assembled providing maximum strength.

Standard units consist of vertical angle posts at the corners, double rivet angle beams at the top and bottom perimeter and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelf strength can be increased by upgrading to heavy duty beams, adding single rivet beams running front-to-back at the intermediate levels, upgrading to double rivet beams at the full perimeter of the intermediate levels or upgrading all levels to our strongest double rivet channel beams. Optional center supports can be added using supplied hardware to increase decking capacity.



Double Rivet unit with 5 levels

The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.



ASSEMBLY
STOCK
T29
TAN (PT)

Single Rivet unit with 5 levels

Double Rivet unit with 4 levels

COMPONENT SPECIFICATIONS





- 1 Angle Post (Standard Duty): 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights. Perfect for standard load situations.
 - **Angle Post (Heavy Duty):** Shall be 1-7/8" x 1-7/8" x 14 gauge cold rolled steel uprights. The choice when heavy duty shelving is required. Perfect for multilevel installations.
- **2 T-Post (Standard Duty):** 3" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.
 - **T-Post (Heavy Duty):** 3-3/4" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.
- 3 Single Rivet Shelf Beam (Standard Duty): This 14 gauge low profile standard intermediate level shelf beam is perfect when maximum clear opening is required between shelf levels.
 - **Single Rivet Shelf Beam (Heavy Duty):** An 11 gauge heavy duty version of our low profile intermediate shelf beam allowing maximum clear opening between shelf levels.
- 4 Double Rivet Angle Beam (Standard Duty): This 16 gauge shelf beam is essential for stability of standard units; therefore, is used on all four sides at the top and bottom levels. Can also be used front and back or on all four sides of intermediate levels to increase unit stability and load capacity.
 - **Double Rivet Angle Beam (Heavy Duty):** An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.
- **Double Rivet Channel Beam:** Maximized left-to-right shelf capacity is achieved using our 14 gauge double rivet channel beams in lieu of double rivet angle beams. These beams cannot be used at the bottom level.
- **Center Support:** Used to provide additional shelf support front-to-back by bolting between double rivet beams at prepunched locations. Ideal for wider spans.
- **7 Double Rivet Z-Beam (Standard Duty):** For 12" thru 60" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. When used at bottom level of single rivet units, shelf clearance is increased by 1" at lower level. Standard Z beams are 14 gauge.
- **B** Double Rivet Z-Beam (Heavy Duty): For 69" and 72" beams. Use in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. Heavy-Duty Z beams are 14 gauge
- **9** Center Support for Z-Beam: Used with Z-Beams for front to back decking support. Fabricated of 11 gauge cold rolled steel.






QUICKSHIP TI ESS STEEL

BOLTLESS STEEL SHELVING


UNIT GROWTH CHART

When designing a shelving layout. Unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.

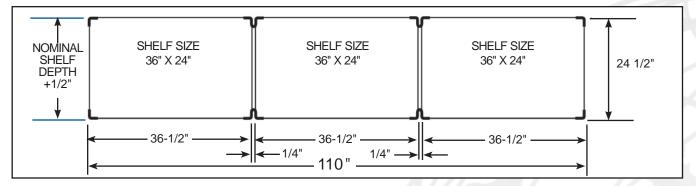


UNIT CLEAR WIDTH

Examples below are based on 36" wide shelf.

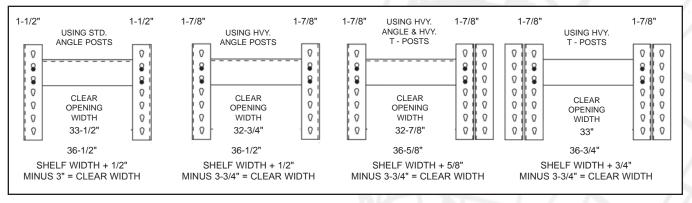


VERTICAL SHELF CLEARANCE FOR SINGLE RIVET UNITS

This chart depicts shelf clearances for typical rivetwell shelving units with 1-1/2" vertical shelf adjustment

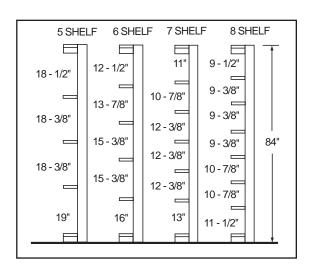

VERTICAL SHELF CLEARANCE FOR DOUBLE RIVET UNITS

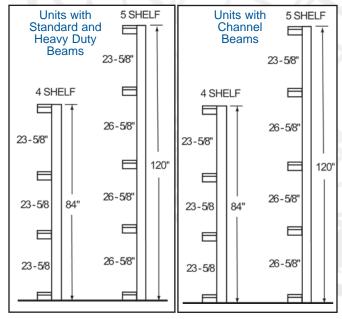

BOLTLESS STEEL SHELVING



			S	INGLE RIVET U	NITS - 84"	HIGH		
36" Wide Units 48" Wide Units							Jnits	
(Decking not included) (Decking not included) Shelf Starter Adder Shelf Starter Add				ncluded)				
Levels	Depth	Shelf Capacity	Starter Model No.	Adder Model No.	Shelf Capacity	Starter Adder		
5 Shelf	12	350	SRS361284-5S	SRS361284-5A	250	SRS481284-5S	SRS481284-5A	
Units	18	350	SRS361884-5S	SRS361884-5A	250	SRS481884-5S	SRS481884-5A	
	24	350	SRS362484-5S	SRS362484-5A	250	SRS482484-5S	SRS482484-5A	
	30	350	SRS363084-5S	SRS363084-5A	250	SRS483084-5S	SRS483084-5A	
	36	350	SRS363684-5S	SRS363684-5A	250	SRS483684-5S	SRS483684-5A	
6 Shelf	12	350	SRS361284-6S	SRS361284-6A	250	SRS481284-6S	SRS481284-6A	
Units	18	350	SRS361884-6S	SRS361884-6A	250	SRS481884-6S	SRS481884-6A	
	24	350	SRS362484-6S	SRS362484-6A	250	SRS482484-6S	SRS482484-6A	
	30	350	SRS363084-6S	SRS363084-6A	250	SRS483084-6S	SRS483084-6A	
	36	350	SRS363684-6S	SRS363684-6A	250	SRS483684-6S	SRS483684-6A	
7 Shelf	12	350	SRS361284-7S	SRS361284-7A	250	SRS481284-7S	SRS481284-7A	
Units	18	350	SRS361884-7S	SRS361884-7A	250	SRS481884-7S	SRS481884-7A	
	24	350	SRS362484-7S	SRS362484-7A	250	SRS482484-7S	SRS482484-7A	
	30	350	SRS363084-7S	SRS363084-7A	250	SRS483084-7S	SRS483084-7A	
36 350 SRS363684-7S SRS363684-7A 250 SRS483684-7		SRS483684-7S	SRS483684-7A					
8 Shelf Units	12	350	SRS361284-8S	SRS361284-8A	250	SRS481284-8S	SRS481284-8A	
Units	18	350	SRS361884-8S	SRS361884-8A	250	SRS481884-8S	SRS481884-8A	
	24	350	SRS362484-8S	SRS362484-8A	250	SRS482484-8S	SRS482484-8A	
	30	350	SRS363084-8S	SRS363084-8A	250	SRS483084-8S	SRS483084-8A	
	36	350	SRS363684-8S	SRS363684-8A	250	SRS483684-8S	SRS483684-8A	

STARTER UNITS consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back single rivet beams at each intermediate level).

ADDER UNITS consist of two standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back single rivet beam at each intermediate level).

PARTICLE BO	OARD DECKING
SIZE	PART NO.
36" X 12"	HPB3612
36" X 18"	HPB3618
36" X 24"	HPB3624
36" X 30"	HPB3630
36" X 36"	HPB3636
48" X 12"	HPB4812
48" X 18"	HPB4818
48" X 24"	HPB4824
48" X 30"	HPB4830
48" X 36"	HPB4836

Be sure to order one each of particle board decking per level. EZ-Deck steel decking can NOT be used on single rivet units.



Standard 5-shelf single rivet unit (order decking separately) Standard 4-shelf double rivet unit (order decking separately)

Deolor Scolor

729 Tan (PT)







				DOORTE KI	VET UNITS - 8	84" HIC	GH WITH 4 LEV	ELS			
				Without Center (Decking Not In			With Center Support (Decking Not Included)			Decking	
Nidth	Beam Type			Starter Model No.	Adder Model No.	Particle Board Decking	EZ-Deck Steel Decking				
48''	Standard	18	550	DRS481884-4S	DRS481884-4A	875	DRSC481884-4S	DRSC481884-4A	HPB4818	HEZD481	
	Angle Beam	24	550	DRS482484-4S	DRS482484-4A	875	DRSC482484-4S	DRSC482484-4A	HPB4824	HEZD482	
		30	550	DRS483084-4S	DRS483084-4A	825	DRSC483084-4S	DRSC483084-4A	HPB4830	HEZD483	
		36	550	DRS483684-4S	DRS483684-4A	775	DRSC483684-4S	DRSC483684-4A	HPB4836	HEZD483	
		48	550	DRS484884-4S	DRS484884-4A	700	DRSC484884-4S	DRSC484884-4A	HPB4848	HEZD484	
48''	Heavy-Duty	18	750	DRH481884-4S	DRH481884-4A	1400	DRHC481884-4S	DRHC481884-4A	HPB4818	HEZD481	
	Angle	24	750	DRH482484-4S	DRH482484-4A	1400	DRHC482484-4S	DRHC482484-4A	HPB4824	HEZD482	
		30	750	DRH483084-4S	DRH483084-4A	1310	DRHC483084-4S	DRHC483084-4A	HPB4830	HEZD483	
		36	750	DRH483684-4S	DRH483684-4A	1220	DRHC483684-4S	DRHC483684-4A	HPB4836	HEZD483	
60''	Harris Distr	48	750	DRH484884-4S	DRH484884-4A	1125	DRHC484884-4S	DRHC484884-4A	HPB4848	HEZD484	
bU	Heavy-Duty	18	600	DRH601884-4S	DRH601884-4A	1200	DRHC601884-4S	DRHC601884-4A	HPB6018	HEZD601	
	Angle Beam	24 30	600 600	DRH602484-4S DRH603084-4S	DRH602484-4A DRH603084-4A	1200 1200	DRHC602484-4S DRHC603084-4S	DRHC602484-4A DRHC603084-4A	HPB6024 HPB6030	HEZD602 HEZD603	
		36	600	DRH603684-4S	DRH603684-4A	1200	DRHC603684-4S	DRHC603684-4A	HPB6030	HEZD603	
		48	600	DRH604884-4S	DRH604884-4A	1200	DRHC604884-4S	DRHC604884-4A	HPB6048	HEZD604	
60''	Channel	18	- 000	DITI 1004004-43	DITI1004004-4A	2000	DRCC601884-4S	DRCC601884-4A	HPB6018	HEZD601	
00	Beam	24	_			2000	DRCC602484-4S	DRCC602484-4A	HPB6024	HEZD602	
	Deam	30	_			2000	DRCC603084-4S	DRCC603084-4A	HPB6030	HEZD603	
		36	-	_	_	2000	DRCC603684-4S	DRCC603684-4A	HPB6036	HEZD603	
		48	_	_	_	2000	DRCC604884-4S	DRCC604884-4A	HPB6048	HEZD604	
72''	Heavy-Duty	18	500	DRH721884-4S	DRH721884-4A	1000	DRHC721884-4S	DRHC721884-4A	HPB7218	HEZD721	
	Angle Beam	24	500	DRH722484-4S	DRH722484-4A	1000	DRHC722484-4S	DRHC722484-4A	HPB7224	HEZD722	
		30	500	DRH723084-4S	DRH723084-4A	1000	DRHC723084-4S	DRHC723084-4A	HPB7230	HEZD723	
		36	500	DRH723684-4S	DRH723684-4A	1000	DRHC723684-4S	DRHC723684-4A	HPB7236	HEZD723	
		48	500	DRH724884-4S	DRH724884-4A	1000	DRHC724884-4S	DRHC724884-4A	HPB7248	HEZD724	
72''	Channel	18	-	-	-	1850	DRCC721884-4S	DRCC721884-4A	HPB7218	HEZD721	
	Beam	24	-	-	-	1850	DRCC722484-4S	DRCC722484-4A	HPB7224	HEZD722	
		30	-	-	-	1850	DRCC723084-4S	DRCC723084-4A	HPB7230	HEZD723	
		36	-	-	-	1850	DRCC723684-4S	DRCC723684-4A	HPB7236	HEZD723	
		48	-	-	-	1850	DRCC724884-4S	DRCC724884-4A	HPB7248	HEZD724	
96''	Heavy-Duty	18	-	-	-	620	DRHC961884-4S	DRHC961884-4A	HPB9618	HEZD961	
	Angle Beam	24	-	-	-	620	DRHC962484-4S	DRHC962484-4A	HPB9624	HEZD962	
		30	-	-	-	620	DRHC963084-4S	DRHC963084-4A	HPB9630	HEZD963	
		36	-	-	-	620	DRHC963684-4S	DRHC963684-4A	HPB9636	HEZD963	
		48	-	-	-	620	DRHC964884-4S	DRHC964884-4A	HPB9648	HEZD964	
96''	Channel	18	-	-	-	1400	DRCC961884-4S	DRCC961884-4A	HPB9618	HEZD961	
	Beam	24	-	-	-	1400	DRCC962484-4S	DRCC962484-4A	HPB9624	HEZD962	
		30	-	-	-	1400	DRCC963084-4S	DRCC963084-4A	HPB9630	HEZD963	
		36	-	-	-	1400	DRCC963684-4S	DRCC963684-4A	HPB9636	HEZD963	
		48	-	-	-	1400	DRCC964884-4S	DRCC964884-4A	HPB9648	HEZD964	
						20'' HI	GH WITH 5 LEV	'ELS			
72''	Heavy-Duty	30	500	DRH7230120-5S	DRH7230120-5A	1000	DRHC7230120-5S	DRHC7230120-5A	HPB7230	HEZD723	
	Angle Beam	36	500	DRH7236120-5S	DRH7236120-5A	1000	DRHC7236120-5S	DRHC7236120-5A	HPB7236	HEZD723	
		48	500	DRH7248120-5S	DRH7248120-5A	1000	DRHC7248120-5S	DRHC7248120-5A	HPB7248	HEZD724	
72''	Channel	30	-	-	-	1490	DRCC7230120-5S	DRCC7230120-5A	HPB7230	HEZD723	
	Beam	36	-	-	-	1490	DRCC7236120-5S	DRCC7236120-5A	HPB7236	HEZD723	
		48	-	-	-	1490	DRCC7248120-5S	DRCC7248120-5A	HPB7248	HEZD724	
96''	Heavy-Duty	30	-	-	-	620	DRHC9630120-5S	DRHC9630120-5A	HPB9630	HEZD963	
	Angle Beam	36	-	-	-	620	DRHC9636120-5S	DRHC9636120-5A	HPB9636	HEZD963	
		48	-	-	-	620	DRHC9648120-5S	DRHC9648120-5A	HPB9648	HEZD964	
96''	Channel	30	-	-	-	1400	DRCC9630120-5S	DRCC9630120-5A	HPB9630	HEZD963	
	Beam	36	-	-	-	1400	DRCC9636120-5S	DRCC9636120-5A	HPB9636	HEZD963	
		10				1/100	DDCC0640120 EC	DDCC0640120 EA	HDD0640	HEZDOC/	

Starter units consist of four standard angle posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back

standard double rivet angle beams per level.

Adder units consist of two standard T-Posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. *Channel beam units are provided with left-to-right double rivet angle beams at bottom level.

1400 DRCC9648120-5S DRCC9648120-5A HPB9648

RECORD STORAGE UNITS & BOXES



				REC	ORD STORAGE UN	IITS		
Width	Depth	Height	Levels	No. of boxes	Starter Model No.	Adder Model No.	Particle Board Decking	EZ-Deck Steel Decking
42''	15''	60''	3	18	RS421560-3S	RS421560-3A	HPB4215	HEZD4215
	30''	60''	3	36	RS423060-3S	RS423060-3A	HPB4230	HEZD4230
69''	15''	60''	3	30	RS691560-3S	RS691560-3A	HPB6915	HEZD6915
	30''	60''	3	60	RS693060-3S	RS693060-3A	HPB6930	HEZD6930
42''	15''	84''	4	24	RS421584-4S	RS421584-4A	HPB4215	HEZD4215
	30''	84''	4	48	RS423084-4S	RS423084-4A	HPB4230	HEZD4230
69''	15''	84''	4	40	RS691584-4S	RS691584-4A	HPB6915	HEZD6915
	30''	84''	4	80	RS693084-4S	RS693084-4A	HPB6930	HEZD6930
42''	15''	108''	5	30	RS4215108-5S	RS4215108-5A	HPB4215	HEZD4215
	30''	108''	5	60	RS4230108-5S	RS4230108-5A	HPB4230	HEZD4230
69''	15''	108''	5	50	RS6915108-5S	RS6915108-5A	HPB6915	HEZD6915
	30''	108''	5	100	RS6930108-5S	RS6930108-5A	HPB6930	HEZD6930

Be sure to order one each of particle board or EZ-Deck steel decking per level. The above units do not include record storage boxes.

HALLOWELL RECORD STORAGE BOXES are 12"w x 15"d x 10"h and are constructed of 200# test white corrugated. Includes double thickness bottoms and reinforced carry handles. Must be ordered in lots of 20.



Access Unit From Front or Back!



Record Storage Unit with 4 levels (80 Box unit)

Scolor 729 TAN





QUICKSHIPPARTICLE BOARD AND EZ-DECK™ CAPACITY RATINGS

Recommended safe use load table for 5/8" particle board and EZ-Deck steel decking allowable uniformly distributed static live loads for deck material

		2 SIDES S	UPPORTED	4 SIDES S	UPPORTED	4 SIDES - SUPP	+ CENTER ORTED	4 SIDES + SUPP	and the second s	
Size (inches) W x D	Particle Board Decking	EZ-Deck Steel Decking	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	
36x12	HPB3612	HEZD3612	425	0.06	675	0.08				
36x18	HPB3618	HEZD3618	400	0.17	550	0.18				
36x24	HPB3624	HEZD3624	305	0.30	435	0.23				
36x30	HPB3630	HEZD3630	250	0.47	385	0.32				
36x36	HPB3636	HEZD3636	150	0.50	180	0.39				
42x12	HPB4212	HEZD4212	490	0.06	755	0.08				
42x18	HPB4218	HEZD4218	460	0.17	600	0.18				
42x24	HPB4224	HEZD4224	355	0.30	500	0.29				
42x30	HPB4230	HEZD4230	300	0.47	410	0.36				
42x36	HPB4236	HEZD4236	175	0.50	385	0.45				
48x12	HPB4812	HEZD4812	560	0.06	850	0.08	1160	0.08		
48x18	HPB4818	HEZD4818	525	0.17	635	0.18	770	0.10		
48x24	HPB4824	HEZD4824	405	0.30	530	0.30	700	0.11		
48x30	HPB4830	HEZD4830	325	0.47	440	0.40	705	0.12		
48x36	HPB4836	HEZD4836	200	0.50	400	0.50	755	0.12		
48x48	HPB4848	HEZD4848	85	0.50	275	0.50	920	0.13		
60x18	HPB6018	HEZD6018	660	0.17	735	0.18	835	0.12	1140	0.08
60x24	HPB6024	HEZD6024	505	0.30	615	0.32	700	0.15	1180	0.10
60x30	HPB6030	HEZD6030	410	0.47	520	0.46	650	0.16	1324	0.11
60x36	HPB6036	HEZD6036	250	0.50	380	0.50	665	0.17	1520	0.12
60x48	HPB6048	HEZD6048	105	0.50	230	0.50	750	0.18	2000	0.14
69x15	HPB6915	HEZD6915	900	0.11	950	0.12	1150	0.12	1250	0.11
69x30	HPB6930	HEZD6930	470	0.50	600	0.50	670	0.20	1220	0.13
72x18	HPB7218	HEZD7218	800	0.17	850	0.17	1000	0.15	1200	0.10
72x24	HPB7224	HEZD7224	605	0.30	680	0.31	770	0.19	1135	0.12
72x30	HPB7230	HEZD7230	500	0.47	610	0.50	680	0.21	1200	0.14
72x36	HPB7236	HEZD7236	300	0.50	390	0.50	655	0.23	1325	0.16
72x48	HPB7248	HEZD7248	130	0.50	215	0.50	685	0.25	1670	0.18
84x24	HPB8424	HEZD8424	705	0.30	765	0.31	870	0.23	1150	0.15
84x30	HPB8430	HEZD8430	570	0.47	650	0.49	735	0.27	1150	0.18
84x36	HPB8436	HEZD8436	355	0.50	415	0.50	670	0.29	1210	0.20
84x48	HPB8448	HEZD8448	150	0.50	215	0.50	660	0.33	1460	0.23
96x18	HPB9618	HEZD9618	1050	0.17	1115	0.17	1300	0.18	1500	0.15
96x24	HPB9624	HEZD9624	810	0.30	850	0.31	1000	0.26	1200	0.18
96x30	HPB9630	HEZD9630	655	0.47	710	0.49	800	0.32	1180	0.20
96x36	HPB9636	HEZD9636	405	0.50	450	0.50	710	0.36	1150	0.24
96x48	HPB9648	HEZD9648	170	0.50	200	0.50	650	0.41	1325	0.28

Wire Decking	Size (inches) W x D	Wire Supports	Capacity (lbs)
HWD3618	36" x 18"	4	725
HWD3624	36" x 24"	4	605
HWD3630	36" x 30"	4	485
HWD3636	36" x 36"	4	455
HWD3648	36" x 48"	4	300
HWD4818	48" x 18"	5	725
HWD4824	48" x 24"	5	605
HWD4830	48" x 30"	5	485
HWD4836	48" x 36"	5	455
HWD4848	48" x 48"	5	300
HWD6018	60" x 18"	6	725
HWD6024	60" x 24"	6	605
HWD6030	60" x 30"	6	485
HWD6036	60" x 36"	6	455
HWD6048	60" x 48"	6	300


All wire decks are powder coated gray.

All sizes measure 1/8" short of nominal dimension in both directions.

NOTE: The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2.


EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth). 15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity.

NOTE: EZ-Deck must be center supported on units 48" wide and wider. EZ-Deck steel decking can NOT be used on single rivet units.

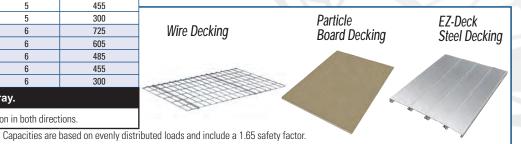


RIVETWELLTM TIRE, MUFFLER AND TAILPIPE STORAGE UNITS

	TIRE STORAGE RACKS										
Width	Depth	Height	Levels	*Tire Capacity	Starter Model No.	Adder Model No.					
SINGLE ROW											
60''	21''	84''	3	24	TSS602184-3S	TSS602184-3A					
	21''	120''	4	32	TSS6021120-4S	TSS6021120-4A					
	21''	144''	5	40	TSS6021144-5S	TSS6021144-5A					
			DOU	BLE ROW							
60''	21''	84''	3	48	TSD602184-3S	TSD602184-3A					
	21''	120''	4	64	TSD6021120-4S	TSD6021120-4A					
	21''	144''	5	80	TSD6021144-5S	TSD6021144-5A					



NOTE: 144" high units are supplied with two 6' posts spliced to achieve 12' height. 192" high units are supplied with two 8' posts spliced to achieve 16' height. For additional configurations, please contact our inside sales department.



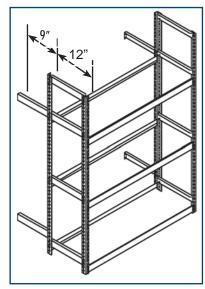


Tire Storage Rack

	MUFFLER S	Particle Board Decking					
Width	Depth	Height	Levels	Starter Model No.	Adder Model No.	Size	Part No.
48''	36''	84''	5	MS483684-5S	MS483684-5A	48'' X 36''	HPB4836
96''	36''	84''	5	MS963684-5S	MS963684-5A	96'' X 36''	HPB9636

Be sure to order one each of particle board decking per level.

HANGING TAILPIPE RACK								
Width	Depth	Height	Starter Model No.					
48''	18''	120''	HTP4818120					
96''	18''	120''	HTP9618120					

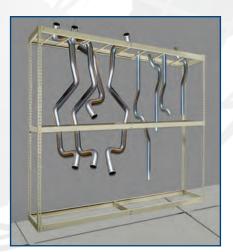

Hanging Tailpipe Rack



Tire Rack



729 TAN (PT)



Muffler Storage Rack



COMMERCIAL KD CABINETS



2 YEAR KD KNOCK DOWN ASSEMBLY Functional • Durable • Adaptable

DOOR OPTIONS:

• Safety-View (includes polycarbonate panels in door)

• Solid

Wardrobe includes 1 shelf and coat rod
 Combination includes 1 full width shelf,
 2 helf width shelves and a helf width coat ro

• Storage includes 4 adjustable shelves

3 half width shelves, and a half width coat rod

24" Deep Storage Cabinets are available in stationary



24" Deep Storage Cabinets are available in stationary and mobile versions.

GENERAL SPECIFICATIONS

- All components precision engineered with no bolt heads showing on front and side panels
- Body and shelves fabricated from 22 gauge steel
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 200 lbs)
- Reinforced doors swing a full 180°
- 22 gauge steel Doors are factory-hung in 16 gauge frames ensuring proper performance
- 16 gauge continuous hinges
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units)
- Positive three-point locking (top, center and bottom) for secure locking
- Plated locking handle has built-in cylinder key lock (keys included)
- Mobile units include four heavy-duty locking swivel casters



BLACK



DARK GRAY SAFETY-VIEW DOORS



TAN



708 Black (ME)

725 Dark Gray (HG) 729 TAN (PT)



COMMERCIAL KD CABINETS



400 SERIES COMMERCIAL KD CABINETS







MOBILE STORAGE

STATIONARY WARDROBE

STATIONARY COMBINATION

Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Colors Standard Finish
SOLID DOOR CABINETS,	400 SERIES					
Stationary, Storage	36	18	72	415S18	415S18A	ME, HG, PT
Stationary, Storage	36	24	72	415S24	415S24A	ME, HG, PT
Stationary, Storage	48	18	72	425S18	425S18A	ME, HG
Stationary, Storage	48	24	72	425S24	425S24A	ME, HG, PT
Stationary, Wardrobe	36	18	72	435W18	435W18A	ME, HG, PT
Stationary, Wardrobe	36	24	72	435W24	435W24A	ME, HG, PT
Stationary, Wardrobe	48	18	72	445W18	445W18A	ME, HG
Stationary, Wardrobe	48	24	72	445W24	445W24A	ME, HG, PT
Stationary, Combination	36	18	72	455C18	455C18A	ME, HG, PT
Stationary, Combination	36	24	72	455C24	455C24A	ME, HG, PT
Stationary, Combination	48	18	72	465C18	465C18A	ME, HG
Stationary, Combination	48	24	72	465C24	465C24A	ME, HG, PT
Mobile, Storage	36	24	72	415S24M	415S24MA	ME, HG, PT
Mobile, Storage	48	24	72	425S24M	425S24MA	ME, HG, PT
SAFETY VIEW DOOR CAR	BINETS, 400	SERIES				
Stationary, Storage	36	18	72	415S18SV	415S18SVA	ME, HG
Stationary, Storage	36	24	72	415S24SV	415S24SVA	ME
Stationary, Wardrobe	36	18	72	435W18SV	435W18SVA	ME, HG
Stationary, Wardrobe	36	24	72	435W24SV	435W24SVA	ME
Stationary, Combination	36	18	72	455C18SV	455C18SVA	ME, HG
Stationary, Combination	36	24	72	455C24SV	455C24SVA	ME
Mobile, Storage	36	24	72	415S24SVM	415S24SVMA	ME





INDUSTRIAL KD CABINETS



2 YEAR KD KNOCK DOWN ASSEMBLY Industrial Strength Storage

CONFIGURATIONS:

- **Storage** includes 4 adjustable shelves
- Wardrobe includes 1 shelf and coat rod
- Combination includes 1 full width shelf,

3 half width shelves, and a half width coat rod

Provides maximum protection to tools, dies, delicate instruments, supplies, and personal belongings. Designed to meet government requirements.

24" Deep Storage Cabinets are available in stationary and mobile versions.



GENERAL SPECIFICATIONS

- All components precision engineered with no bolt heads showing on front and side panels
- 20 gauge body with 22 gauge shelves provide strength and durability
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 250 lbs).
- Reinforced doors swing a full 180°
- 20 gauge solid steel doors are factory-hung in 16 gauge frames ensuring proper performance

- 16 gauge continuous hinges
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units)
- Positive three-point locking (top, center and bottom) for secure locking
- Plated locking handle has built-in cylinder key lock (keys included)
- Mobile units include four heavy-duty locking swivel casters









DARK GRAY SAFETY-VIEW DOORS

LIGHT GRAY

ANTIMICROBIAL



708 Black (ME)

729 Tan (PT) 725 Dark Gray (HG) 711 LIGHT GRAY ANTIMICROBIAL (PL-AM) Order your cabinets in our specially formulated Light Gray Antimicrobial powder coat finish that protects against bacteria, mold & yeast for up to 20 years!

INDUSTRIAL KD CABINETS

Art Metal Products

800 SERIES INDUSTRIAL KD CABINETS



Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Colors Standard Finish	MedSafe Light Gray Antimicrobal Finish
SOLID DOOR CABINETS,	800 SERIES						
Stationary, Storage	36	18	78	815S18	815S18A	ME, PT, HG	PL-AM
Stationary, Storage	36	24	78	815S24	815S24A	ME, PT, HG	
Stationary, Storage	48	18	78	825S18	825S18A	ME	
Stationary, Storage	48	24	78	825S24	825S24A	ME, PT	
Stationary, Wardrobe	36	18	78	835W18	835W18A	ME, PT, HG	PL-AM
Stationary, Wardrobe	36	24	78	835W24	835W24A	ME, PT, HG	
Stationary, Wardrobe	48	18	78	845W18	845W18A	ME	
Stationary, Wardrobe	48	24	78	845W24	845W24A	ME, PT	
Stationary, Combination	36	18	78	855C18	855C18A	ME, PT, HG	PL-AM
Stationary, Combination	36	24	78	855C24	855C24A	ME, PT, HG	
Stationary, Combination	48	18	78	865C18	865C18A	ME	
Stationary, Combination	48	24	78	865C24	865C24A	ME, PT	
Mobile, Storage	36	24	78	815S24M	815S24MA	ME, PT, HG	
Mobile, Storage	48	24	78	825S24M	825S24MA	ME, PT	





DURATOUGH

CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS

For Really Tough Industrial Applications

KD KNOCK DOWN ASSEMBLY



Storage Cabinet

16 gauge Classic & Galvanite™

14 gauge Classic & Galvanite™

12 gauge Classic & Galvanite™



16 gauge Classic & Galvanite™

14 gauge Classic & Galvanite™

12 gauge Classic & Galvanite™

GENERAL SPECIFICATIONS

CLASSIC SERIES CABINETS are fabricated from prime grade cold rolled sheet steel.

GALVANITE SERIES CABINETS are fabricated from galvannealed sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating is scratched away.

HEAVY-DUTY CABINETS are 16 gauge with 16 gauge shelves

EXTRA HEAVY-DUTY CABINETS are 14 gauge with14 gauge shelves

SUPER-DUTY CABINETS are 12 gauge with14 gauge shelves **SAFETY-VIEW® SERIES CABINETS** incorporate polycarbonate panels in both doors of our extra heavy-duty 14 gauge Classic Series cabinets allowing contents to be visible without compromising security.

VENTILATED SERIES CABINETS are fabricated to the same rugged standards as our extra heavy-duty 14 gauge Classic Series cabinets with the added benefit of being fully ventilated with diamond perforated doors and sides and a 13 gauge flattened expanded metal back.



738 CHARCOAL (CL)

CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS



All the rugged standard features of our popular Classic Series DuraTough cabinets with the added strength and security of 12 gauge sides and doors.



Safety-View Cabinet 14 gauge Classic



Ventilated Cabinet 14 gauge Classic





18-gauge full-height door stiffener provides maximum rigidity to both doors



Heavy-Duty 3/16" thick steel handle with padlock hasp



1/8" thick latch and 3/8" diameter lock rods insure maximum security



STANDARD FEATURES FOR ALL DURATOUGH™ CLASSIC AND GALVANITE™ SERIES CABINETS

- All-welded construction
- · Double door design
- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
- Solid sides are formed to be integral with vertical door frame.
- Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

- Back is welded to cabinet top, bottom and sides
- Shelves are formed to provide maximum capacity and are adjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.
- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves
- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partial-width coat rod
- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- Color: 738 Charcoal





CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS

DUR	ATOUGH™	CLASS	IC SERI	ES	
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
16 GAUGE HEAVY-DUT	Υ				
HW6SC6142-2	Storage	36	21	42	2
HW6SC6160-3	Storage	36	21	60	3
HW6SC6178-4	Storage	36	21	78	4
HW6SC6478-4	Storage	36	24	78	4
HW6SC8460-3	Storage	48	24	60	3
HW6SC8478-4	Storage	48	24	78	4
HW6SC0478-4	Storage	60	24	78	4
HW6CC6478-4	Combination	36	24	78	4
HW6CC8478-4	Combination	48	24	78	4
HW6CC0478-4	Combination	60	24	78	4
14 GAUGE EXTRA HEA	VY-DUTY				
HW4SC6142-2	Storage	36	21	42	2
HW4SC6160-3	Storage	36	21	60	3
HW4SC6178-4	Storage	36	21	78	4
HW4SC6478-4	Storage	36	24	78	4
HW4SC8460-3	Storage	48	24	60	3
HW4SC8478-4	Storage	48	24	78	4
HW4SC0478-4	Storage	60	24	78	4
HW4CC6478-4	Combination	36	24	78	4
HW4CC8478-4	Combination	48	24	78	4
HW4CC0478-4	Combination	60	24	78	4
14 GAUGE VENTILATED	1				
HW4VSC6478-4	Storage	36	24	78	4
HW4VSC8478-4	Storage	48	24	78	4
14 GAUGE SAFETY-VIEV	N ®				
HW4SVSC6478-4	Storage	36	24	78	4
HW4SVSC8478-4	Storage	48	24	78	4
12 GAUGE SUPER-DUT	Υ				
HW2SC6478-4	Storage	36	24	78	4
HW2SC8478-4	Storage	48	24	78	4
HW2SC0478-4	Storage	60	24	78	4
HW2CC6478-4	Combination		24	78	4
HW2CC8478-4	Combination		24	78	4
HW2CC0478-4	Combination	60	24	78	4

DUR#	ATOUGH™ G.	ALVAN	ITE SEF	RIES 🥄	
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
HEAVY-DUTY-16 GAU	GE				
HWG6SC6142-2	Storage	36	21	42	2
HWG6SC6160-3	Storage	36	21	60	3
HWG6SC6178-4	Storage	36	21	78	4
HWG6SC6478-4	Storage	36	24	78	4
HWG6SC8460-3	Storage	48	24	60	3
HWG6SC8478-4	Storage	48	24	78	4
HWG6SC0478-4	Storage	60	24	78	4
HWG6CC6478-4	Combination	36	24	78	4
HWG6CC8478-4	Combination	48	24	78	4
HWG6CC0478-4	Combination	60	24	78	4
EXTRA HEAVY-DUTY-	14 GAUGE				
HWG4SC6142-2	Storage	36	21	42	2
HWG4SC6160-3	Storage	36	21	60	3
HWG4SC6178-4	Storage	36	21	78	4
HWG4SC6478-4	Storage	36	24	78	4
HWG4SC8460-3	Storage	48	24	60	3
HWG4SC8478-4	Storage	48	24	78	4
HWG4SC0478-4	Storage	60	24	78	4
HWG4CC6478-4	Combination	36	24	78	4
HWG4CC8478-4	Combination	48	24	78	4
HWG4CC0478-4	Combination	60	24	78	4



738 Charcoal (Cl)



CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS



DURATOUGH™ CABINET LEG KITS

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	Legs Per Kit	
HWC4LK-1G-HG	Leg Kit	4	21	4	2	
HWC4LK-4G-HG	Leg Kit	4	24	4	2	

Leg kits can be added to any Hallowell DuraTough Cabinet. Legs are fabricated from galvanneal corrosion resistant steel and are easily bolted to cabinet bottom. Includes hardware for field attachment.



DURATOUGH™ CABINET DRAWERS

Catalog Number	Туре	Width (In)	Depth (In)	Drawer Height	
FKSCD36-2CL	2 Drawer	36	24	7.5	
FKSCD48-2CL	2 Drawer	48	24	7.5	
FKSCD36-3CL	3 Drawer	36	24	5	
FKSCD48-3CL	3 Drawer	48	24	5	

Note: Drawer units should always be installed into the lower portion of the cabinets to insure stability when opening the drawers. *Only one drawer should be opened at a time.*



DURATOUGH™ CLASSIC SERIES - SHELVES

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves		
ADDITIONAL SHELVES, FOR HEAVY-DUTY CABINETS							
HW6SCS61	Shelf	36	21		1		
HW6SCS64	Shelf	36	24		1		
HW6SCS84	Shelf	48	24		1		
ADDITIONAL SHELVES, FOR EXTRA HEAVY-DUTY & SUPER DUTY CABINETS							
HW4SCS61	Shelf	36	21		1		
HW4SCS64	Shelf	36	24		1		
HW4SCS84	Shelf	48	24		1		

DURATOUGH™ GALVANITE SERIES - SHELVES

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves			
ADDITIONAL SHELVES, FOR HEAVY-DUTY CABINETS								
HWG6SCS61	Shelf	36	21		1			
HWG6SCS64	Shelf	36	24		1			
HWG6SCS84	Shelf	48	24		1			
ADDITIONAL SHELVES, FOR EXTRA HEAVY-DUTY & SUPER DUTY CABINETS								
HWG4SCS61	Shelf	36	21		1			
HWG4SCS64	Shelf	36	24		1			
HWG4SCS84	Shelf	48	24		1			





24 DESIGNER POWDER COAT FINISHES FOR METAL LOCKERS

Now Available in Standard, Hammertone and Antimicrobial Finishes



NOTE: All body components of production KD lockers will be painted our standard neutral color, currently 729 Tan (choice of 729 Tan or 725 Dark Gray for HDV body).

Enhance your decor with two-tone color combinations, doors one color and frame a second color, AT NO ADDITIONAL COST.

HAMMERTONE FINISHES

Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

Note: Patterns/colors of textures and metallics will vary due to their nature. No touch up available for hammertone finishes.



Available for all 24 standard colors



Available for all standard 24 colors

Our MedSafe™ antimicrobial finishes with Microban[®] are specially formulated to protect against bacteria, mold, yeast & mildew for up to 20 years! Very beneficial for educational, healthcare, food processing and other hygiene conscious environments.

Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. Art Metal Products reserves the right to modify its designs and/or make changes in specifications or colors without prior notice.





8 DESIGNER COLORS

SOLID COLOR FINISH



SPECKLE FINISH



WOODGRAIN FINISH



VersaMax™ lockers use Formica[®] engineered surfaces, a world leading manufacturer of phenolic products.





Deep Blue



Sandstone

Colors shown are an approximate representation of the actual color. Please do not make your final color selection from printed media or Internet images, as they may not be 100% accurate. For a more accurate color selection call 1-800-252-5633 or e-mail us at info@ArtMetalProducts.com to request actual color samples.

Slate

Sand Speckle



STANDARD KD Wardrobe & Box Lockers



BLACK TIE Commercial Lockers



STAINLESS STEEL Wardrobe & Box Lockers



SAFETY-VIEW® Wardrobe Lockers



SAFETY-VIEW® **PLUS Box Lockers**



DIGITECH™ SAFETY-VIEW® **Electronic Box Lockers**



MEDSAFE™ Antimicrobial Lockers





QUICKSHIP LOCKERS



READYBUILT™ & READYBUILT™ II Ready-To-Go Lockers

Our Quickship stock program is the largest of its kind.



CUBIX™ Modular Box Lockers

Our unparalleled array of stock lockers guarantees you getting the locker you need, whether it is plastic, wood or metal, box or wardrobe, high performance or emergency response, openfront or high security, we have the right locker for you

Order from stock and save time and money. Our distribution network, comprised of six (6) strategically located, full service, company owned and operated distribution centers, allows us to ship your order fast and secure. Our products are packaged above industry standards to safeguard your lockers, making sure they arrive in perfect condition.

We have been providing the quality you demand, the timeliness you require and the service you deserve for over 80 years.



www.ArtMetalProducts.com



PE/GYM All-Welded Ventilated Lockers



MAINTENANCE MAXVIEW™ FREE QUIETTM High Visibility Lockers Lockers



SECURITYMAX™ High Security Lockers



CLUB Prestigious Wood Lockers



HYBRID Wood & Metal Lockers





RECRUITER™ 2 TURNOUT GEAR Ventilated Open-Front Wood **All-Welded Firefighter Gear Lockers** Sport Lockers Lockers



VALUEMAX™ Economy Lockers HEAVY-DUTY



Ventilated Lockers



SINGLE-POINT Welded Lockers

Distribution Centers

Nationwide

REGIONAL

DISTRIBUTION CENTIER MEMPHIS, TIN



Open-Front KD Gear Lockers



GALVANITE™ Corrosion Resistant Lockers



LAPTOP/ **BACKPACK** Ventilated Charger Lockers



CELLPHONE/ **TABLET Mobile Device Lockers**

QUICK-SHIP BENEFITS

- **✓ No Setup Charges**
- **✓ No Minimum Order Quantity**
- **✓ Industry's Best Discount**

ADVANTAGES OF SIX DISTRIBUTION CENTERS

- Reduces Freight Cost
- **Reduces Transit Time**
- **Minimizes Carrier Handling**

REGIONAL DISTRIBUTION

CENTER

MECHANICSBURG,PA

MANUFACTURING & NATIONAL

DISTRIBUTION

CENTER

APOPKA, FL

KID/TEEN Home Lockers



HOME TEAM™ Ventilated Home Lockers



UNIFORM EXCHANGE



LOCKS Hallowell Electronic & Master Built-in Combo & Key, Master Padlock



REGIONAL

DISTRIBUTION CENTIER

RANCHO CUCAMONGA, CA

BSL Bulk Storage Lockers



TASKFORCE XPTM **Emergency Response** Lockers



REGIONAL.

DISTRIBUTION

CENTIER

DAYTON, OH

MANUFACTURING

FACILITY GAINSVILLE, FL

BENCHES & PEDESTALS Steel Adjustable, Stainless steel, Cast Iron Extra Heavy-Duty, Steel, Movable Aluminum



MANUFACTURING **HEADQUARTERS** DEERFIELD BEACH, FL

Phenolic Lockers



AQUAMAXTM **HDPE Plastic Lockers**

MEDSAFE™ AQUAMAX™ **HDPE Antimicrobial Lockers**

Manufacturing Since 1914



1-800-252-5633

401 Jim Moran Blvd. Deerfield Beach, FL 33442

www.ArtMetalProducts.com