


AMP-1005 "BULLDOG" CORRIDOR SINGLE TIER LOCKER (18" OR 24" WIDE) (PRODUCT No. ABC \_ \_ \_ -1)

ELEVATION ' ' / ' ' /

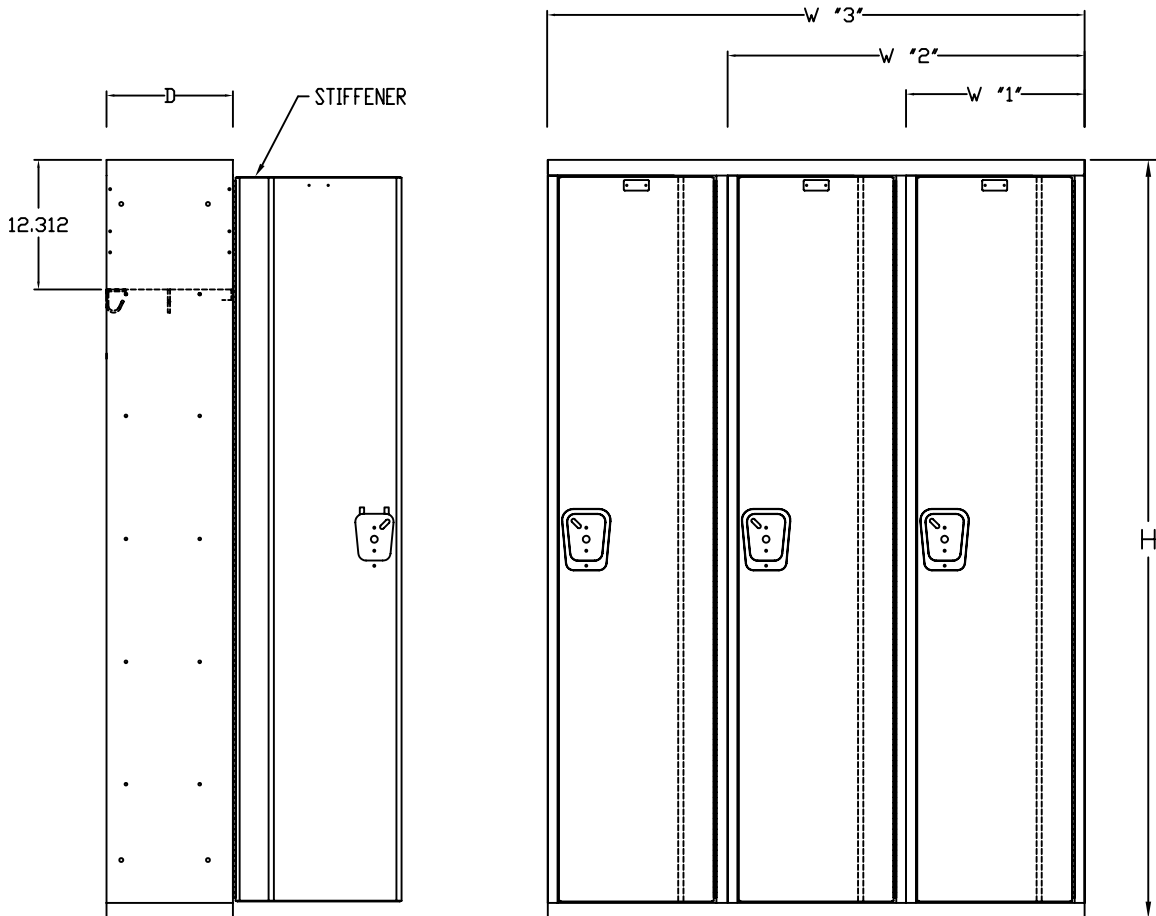

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =  
 INTERIOR COLOR = SAME AS EXTERIOR  
 TOP =  
 HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)  
 DOOR VENTILATION = PLAIN  
 SIDE VENTILATION = SOLID  
 BASE =  
 LOCKS =  
 HINGE = FULL LENGTH, STAKED PIAND  
 HINGE WELDED TO DOOR &  
 RIVETED TO FRAME.

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 STIFFENER = 18 GA. C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM = 16 GA., C.R.S.  
 SHELVES = 16 GA., C.R.S.  
 SIDES = 16 GA., C.R.S.  
 BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

**ART METAL PRODUCTS**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER  
 Customer Order Number: PO#  
 Description: JOB NAME  
 JOB LOCATION

Drawn By: DRAFTER	Checked By:	Date: DATE	Scale: NONE
Acad Number: PAGE NUMBER		Sheet # Of #	Revision:
Drawing Number:		FOLDER NUMBER	