


AMP "HEAVY DUTY VENTILATED" K.D. ATHLETIC DOUBLE TIER LOCKER (18' OR 24' WIDE) (PRODUCT No. HDV _____ -2_)

ELEVATION ' / '

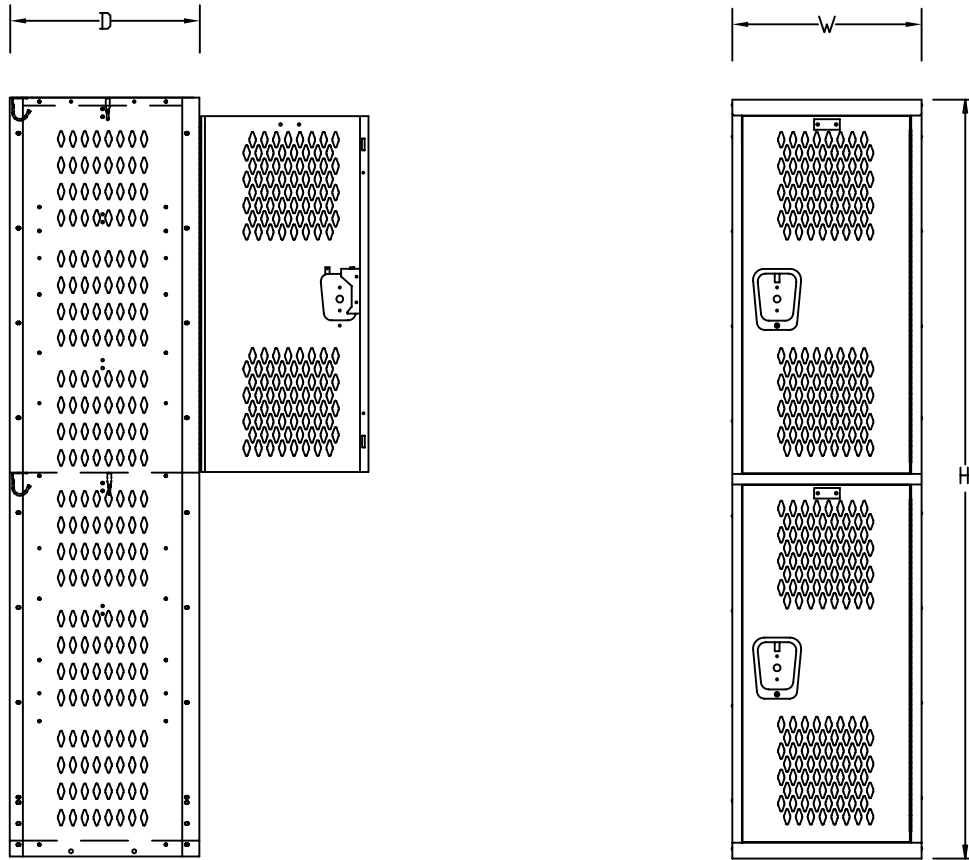

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
 BODY COMPONENT COLOR = 729 PARCHMENT OR
 725 HALLOWELL GRAY

TOP =
 HANDLE = LIFT (S.S. RECESSED DRAWN)
 DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND
 BASE =
 LOCKS =
 HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.
 FRAME = 16 GA., C.R.S.
 TOP = 16 GA., C.R.S.
 BOTTOM = 16 GA., C.R.S.
 SHELVES = 16 GA., C.R.S.
 SIDES = 16 GA., C.R.S.
 BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTOMATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP. 36" TO 20" TALL DOORS.

ART METAL PRODUCTS

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.
 TOLERANCES UNLESS SPECIFIED:
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER		Drawn By: DRAFTER	Checked By:	Date: DATE	Scale: NONE
Customer Order Number: PO#		Acad Number: PAGE NUMBER		Sheet #	Of #
Description: JOB NAME JOB LOCATION		Drawing Number: FOLDER NUMBER		Revision:	