



AMP "HEAVY DUTY VENTILATED" K.D. ATHLETIC FOUR TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. HDV _____ -4_)

ELEVATION ' ' ' /

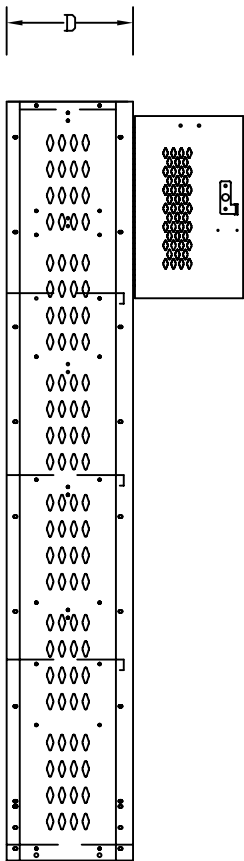

SIDE VIEW

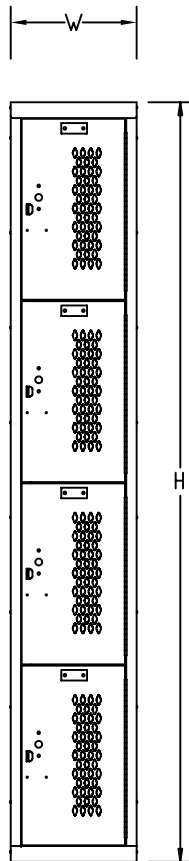

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
BODY COMPONENT COLOR = 729 PARCHMENT OR
725 HALLOWELL GRAY

TOP =
HANDLE = FRICTION CATCH FINGER PULL
DOOR VENTILATION = 7/16" x 15/16" DIAMOND
SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND
BASE =
LOCKS =
HINGE = CONTINUOUS PLAND HINGE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.
FRAME = 16 GA., C.R.S.
TOP = 16 GA., C.R.S.
BOTTOM = 16 GA., C.R.S.
SHELVES = 16 GA., C.R.S.
SIDES = 16 GA., C.R.S.
BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT FRICTION CATCH WITH DOOR PULL. DOOR WILL ACCEPT BUILT-IN LOCK OR PADLOCK.

ART METAL PRODUCTS

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.
TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER Customer Order Number: PO# Description: JOB NAME JOB LOCATION	Drawn By: DRAFTER	Checked By:	Date: DATE	Scale: NONE
Acad Number: PAGE NUMBER			Sheet # Of #	Revision:
Drawing Number:			FOLDER NUMBER	