


AMP "STANDARD K.D." SIXTEEN PERSON LOCKER (PRODUCT No. SK 72 \_ \_ 72-16)

ELEVATION ' ' /

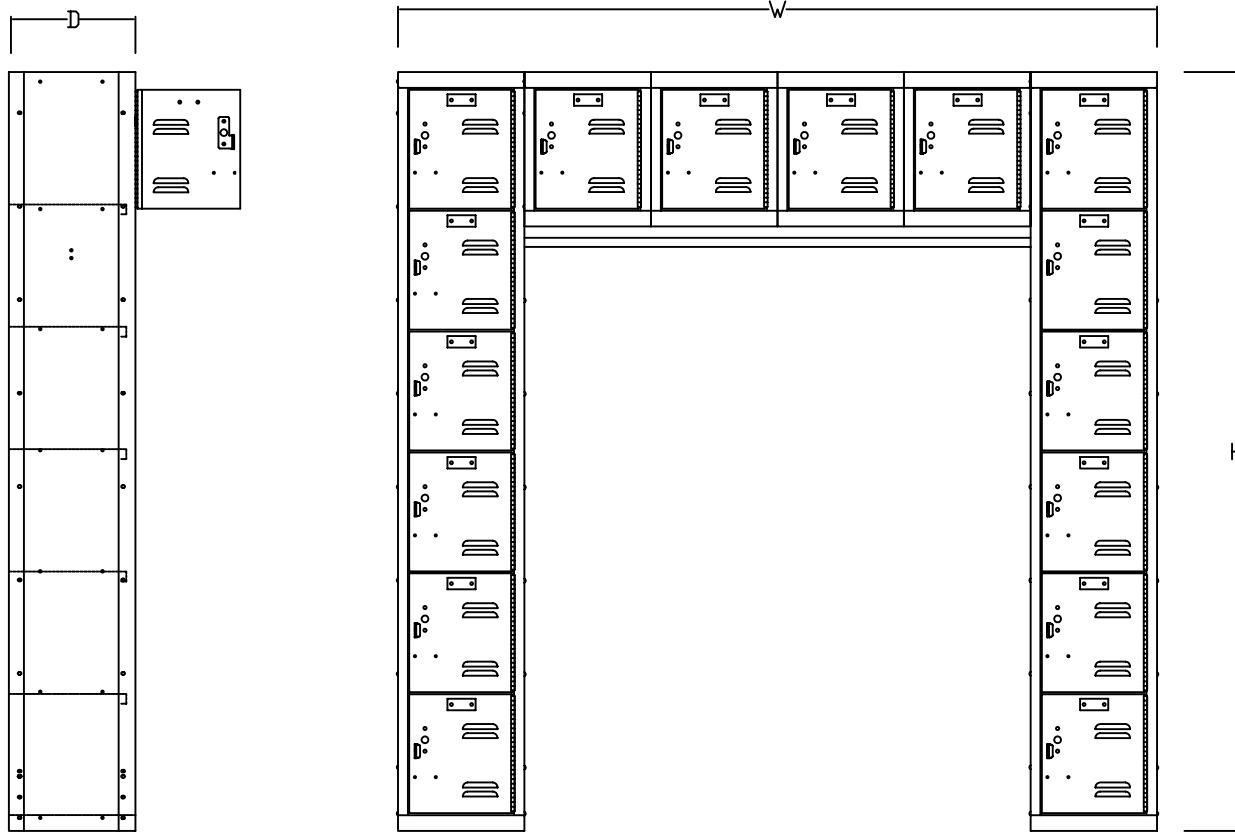

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

- DOOR & FRAME COLOR =
- BODY COMPONENT COLOR = 729 PARCHMENT
- TOP =
- HANDLE = FRICTION CATCH FINGER PULL
- DOOR VENTILATION = 3" LOUVERS
- SIDE VENTILATION = SOLID
- BASE =
- LOCKS =
- HINGE = FULL LENGTH, STAKED PIANO  
HINGE WELDED TO DOOR &  
RIVETED TO THE FRAME

CONTRACTOR NOTE  
ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

- DOOR = 18 GA., C.R.S.
- FRAME = 16 GA., C.R.S.
- TOP = 24 GA., C.R.S.
- BOTTOM = 24 GA., C.R.S.
- SHELVES = 24 GA., C.R.S.
- SIDES = 24 GA., C.R.S.
- BACKS = 24 GA., C.R.S.
- COAT ROD = 7/8" DIA., PLATED TUBE

LATCHING: (BOX DOOR) SINGLE POINT FRICTION CATCH WITH DOOR PULL. DOOR WILL ACCEPT BUILT-IN LOCK OR PADLOCK.

**ART METAL PRODUCTS**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
JOB LOCATION

Drawn By:  
DRAFTER

Checked By:

Date:

DATE

Scale:  
NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER