



AMP "STANDARD K.D." FOUR TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. SK _ _ _ _ _ -4_)

ELEVATION ' ' /

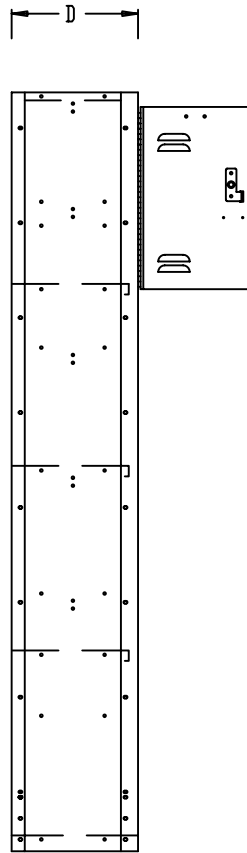

SIDE VIEW

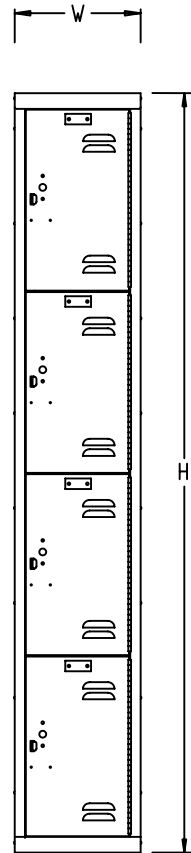

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
 BODY COMPONENT COLOR = 729 PARCHMENT
 TOP =
 HANDLE = FRICTION CATCH FINGER PULL
 DOOR VENTILATION = 3" LOUVERS
 SIDE VENTILATION = SOLID
 BASE =
 LOCKS =
 HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 18 GA., C.R.S.
 FRAME = 16 GA., C.R.S.
 TOP = 24 GA., C.R.S.
 BOTTOM = 24 GA., C.R.S.
 SHELVES = 24 GA., C.R.S.
 SIDES = 24 GA., C.R.S.
 BACKS = 24 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT FRICTION
 CATCH WITH DOOR PULL. DOOR WILL
 ACCEPT BUILT-IN LOCK OR PADLOCK.

ART METAL PRODUCTS

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL
 PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED
 MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.
 TOLERANCES UNLESS SPECIFIED:
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME
 JOB LOCATION

Drawn By:
 DRAFTER

Checked By:

Date: DATE

Scale: NONE

Acad Number: PAGE NUMBER

Sheet # Of # Revision:

Drawing Number:

FOLDER NUMBER