
# AMP "STANDARD QUIET" K.D. TWO PERSON LOCKER (15" TO 18" WIDE) (PRODUCT No. SQ \_ \_ \_ \_ \_ -2P\_) ELEVATION ' '

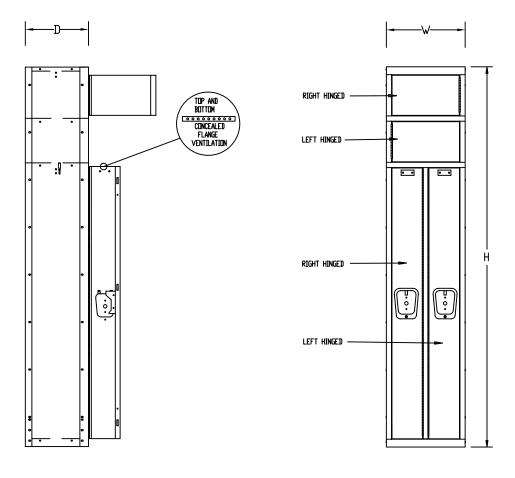

## LOCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENTS COLOR = 729 PARCHMENT

TOP =

HANDLE = LIFT (S.S. RECESSED DRAWN)

DOOR VENTILATION = PLAIN SIDE VENTILATION = SOLID

BASE =

HINGE = CONTINUOUS PIANO HINGE

#### CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE RASE. LICKERS MICT BE ANCHIRED TO WALL.

## GAUGES

DOOR = 18 GA., C.R.S.
FRAME = 16 GA., C.R.S.
TOP = 24 GA., C.R.S.
BOTTOM = 24 GA., C.R.S.
SHELVES = 24 GA., C.R.S.
SIDES = 24 GA., C.R.S.
BACKS = 24 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTO-MATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP, 36' TO 20' TALL DOORS.

SIDE VIEW FRONT VIEW

# ART METAL PRODUCTS

THIS DRAVING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO DITHERS VITHOUT VERITEN PERMISSION, ONLY ART METAL RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Checked By: Drawn By: Date: Scale: Customer: CUSTOMER NONE DRAFTER DATE Customer Order Number: PO# Acad Number: PAGE NUMBER Sheet # Of # Revision: Description: JOB NAME Drawing Number: FOLDER NUMBER JOB LOCATION

ASQ-2PR 10-03-12