



AMP-1002 "CHAMP" ATHLETIC TRIPLE TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. AWA\_ \_ \_ -3)

ELEVATION / /

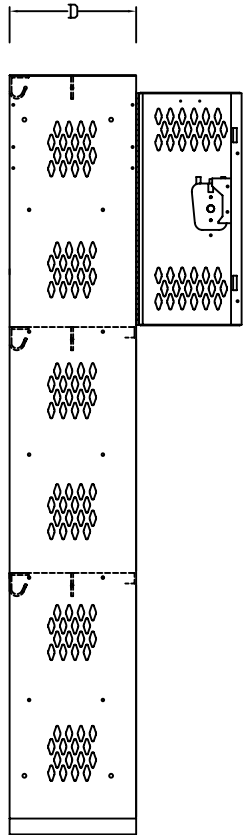

SIDE VIEW

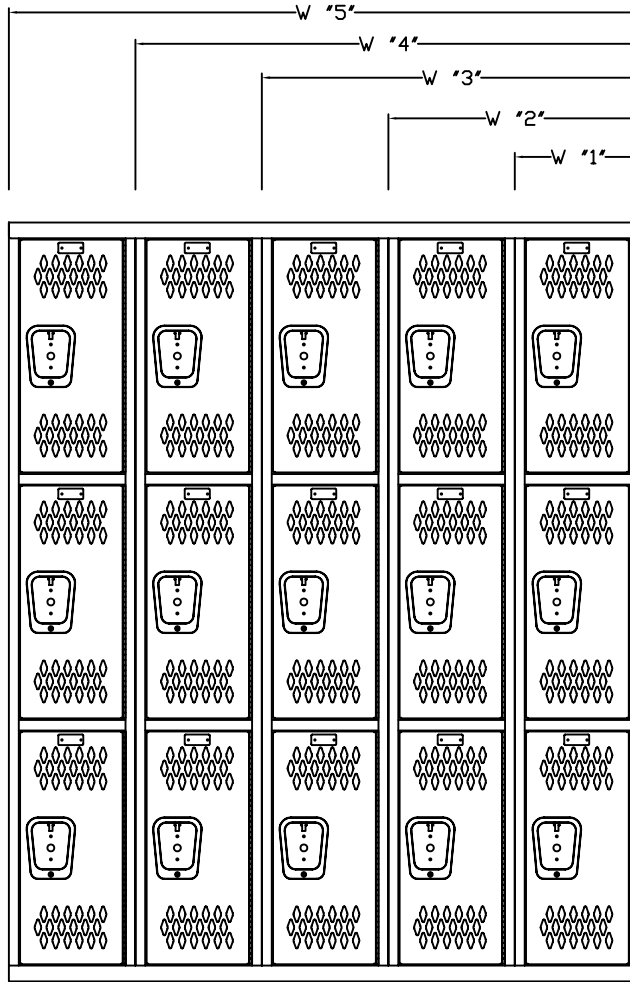

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =  
 INTERIOR COLOR = SAME AS EXTERIOR  
 TOP =  
 HANDLE = LIFT (S.S. RECESSED DRAWN)  
 DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND  
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND  
 BASE =  
 LOCKS =  
 HINGE = FULL LENGTH, STAKED PIAND  
 WELDED TO DOOR & RIVETED  
 TO FRAME

CONTRACTOR NOTE  
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH  
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL  
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE  
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE  
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM BASE = 16 GA., C.R.S.  
 SHELVES = 16 GA., C.R.S.  
 SIDES = 16 GA., C.R.S.  
 BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTO-  
 MATIC LOCKING DEVICE WITH LIFT-TYPE  
 PADLOCK HASP. 36" TO 20" TALL DOORS.

**ART METAL PRODUCTS**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL  
 PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR  
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL  
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED  
 MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Checked By:

Date:  
 DATE

Scale:  
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #      Revision:

Drawing Number:

FOLDER NUMBER