



AMP "HEAVY DUTY VENTILATED" K.D. ATHLETIC SIX TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. HDV \_\_\_\_\_ -6\_)

ELEVATION / /

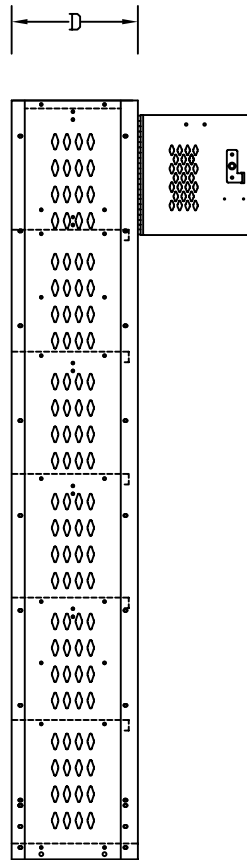

SIDE VIEW

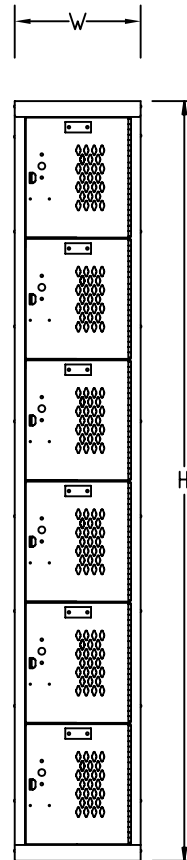

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =  
 BODY COMPONENT COLOR = 729 PARCHMENT OR  
 725 HALLOWELL GRAY

TOP =  
 HANDLE = FRICTION CATCH FINGER PULL  
 DOOR VENTILATION = 7/16" x 15/16" DIAMOND  
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND  
 BASE =  
 LOCKS =  
 HINGE = 16 GA. CONTINUOUS PIANO HINGE  
 STAKED PIN STYLE WELDED TO DOOR  
 AND RIVETED TO FRAME

CONTRACTOR NOTE  
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH  
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL  
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE  
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE  
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM = 16 GA., C.R.S.  
 SHELVES = 16 GA., C.R.S.  
 SIDES = 16 GA., C.R.S.  
 BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT FRICTION  
 CATCH WITH DOOR PULL. DOOR WILL  
 ACCEPT BUILT-IN LOCK OR PADLOCK.

**ART METAL PRODUCTS**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL  
 PROPERTY OF ART METAL, INC. AND SHALL NOT BE COPIED OR  
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY ART METAL  
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED  
 MODIFICATIONS RELEASES ART METAL FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Checked By:

Date:  
 DATE

Scale:  
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #      Revision:

Drawing Number:

FOLDER NUMBER